

2 AMC ANTI-SEISMIC




These brackets are made of mechanical anchoring systems which ensure your unit applications static and provide high reliability for the isolation of low frequency vibrations. In order to improve their performance in seismic applications the technical department of AMC-MECANOCAUCHO designed a new internal architecture to resist such environments.



2 AMC ANTI-SEISMIC

DRAWINGS

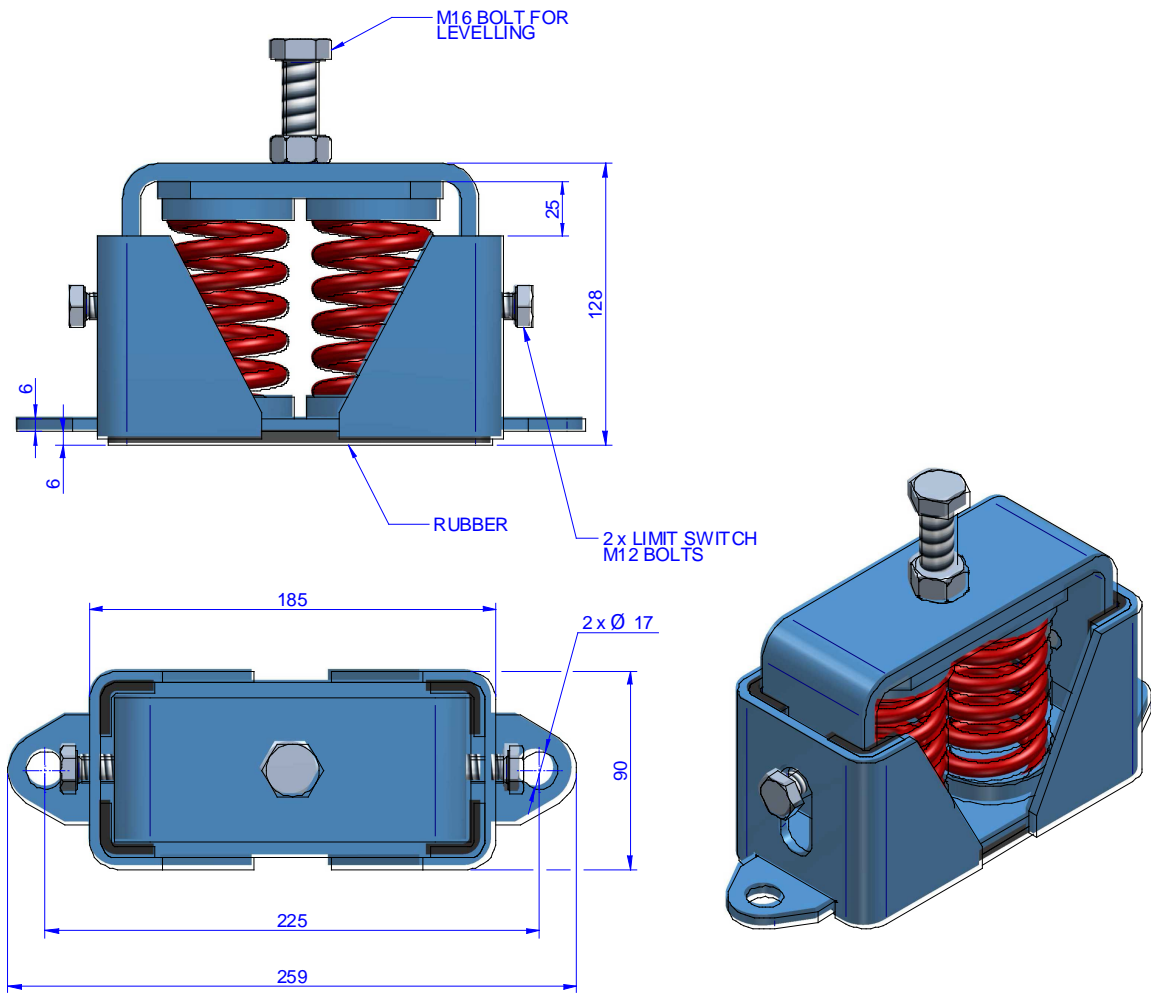


DIMENSIONS

Type	No. Springs	Spring color	DEFLECTION mm	Weight (kg)	LOAD kg MAX	Code
2 AMC ANTI-SEISMIC	2	PURPLE	22	4,931	610	20494
	2	GREEN	22	5,081	810	20496
	2	GREY	22	5,307	1080	20497
	2	WHITE	22	5,135	1224	20498
	2	RED	22	5,479	1606	20500

2 AMC ANTI-SEISMIC

DRAWINGS

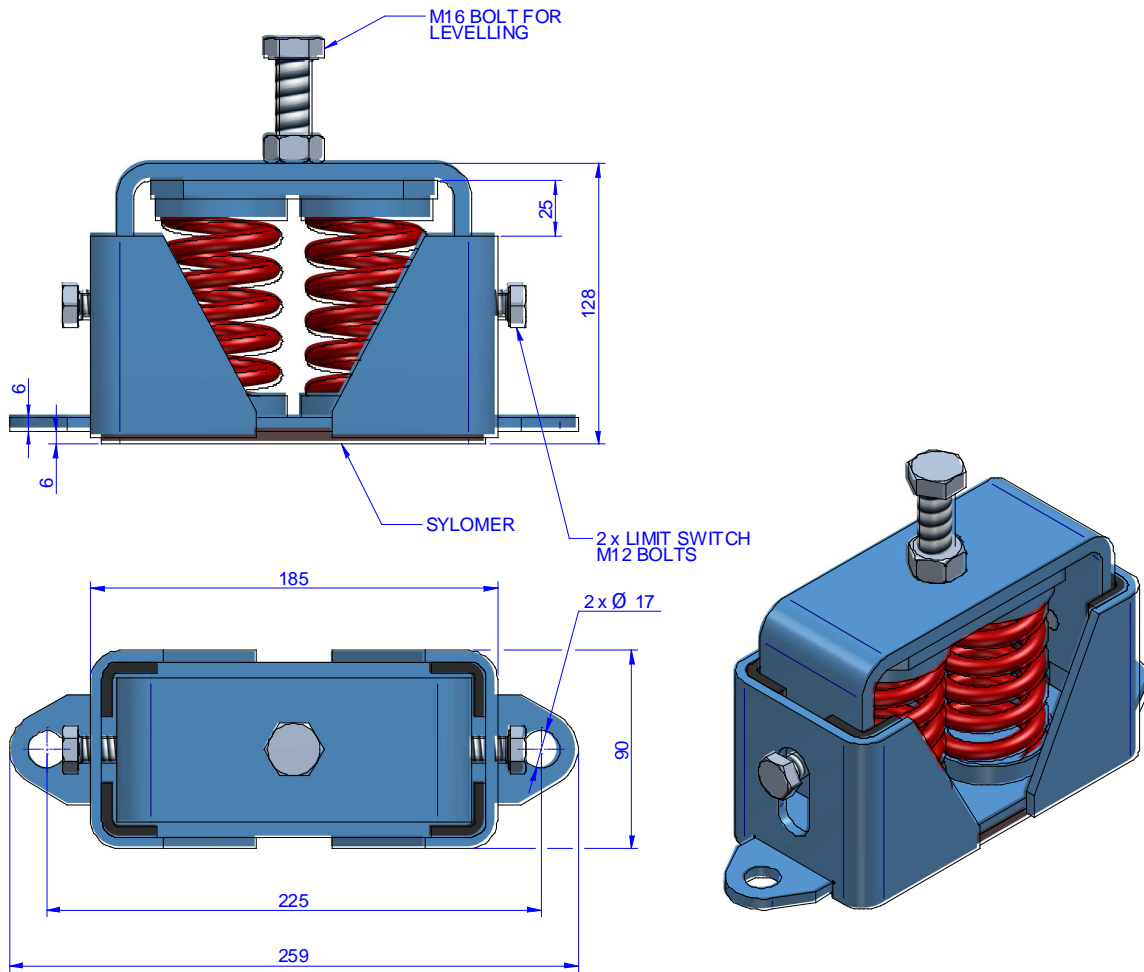


DIMENSIONS

Type	No. Springs	Spring color	DEFLECTION mm	Weight (kg)	LOAD kg MAX	Code
2 AMC ANTI-SEISMIC + SYLOMER	2	PURPLE	22	4,902	610	20480
	2	GREEN	22	5,052	810	20487
	2	GREY	22	5,278	1080	20488
	2	WHITE	22	5,106	1224	20489
	2	RED	22	5,45	1606	20490

2 AMC ANTI-SEISMIC

Elastical properties

LOAD DEFLECTION CURV E
VIBRABS ORBER 2 A NTISEISMIC

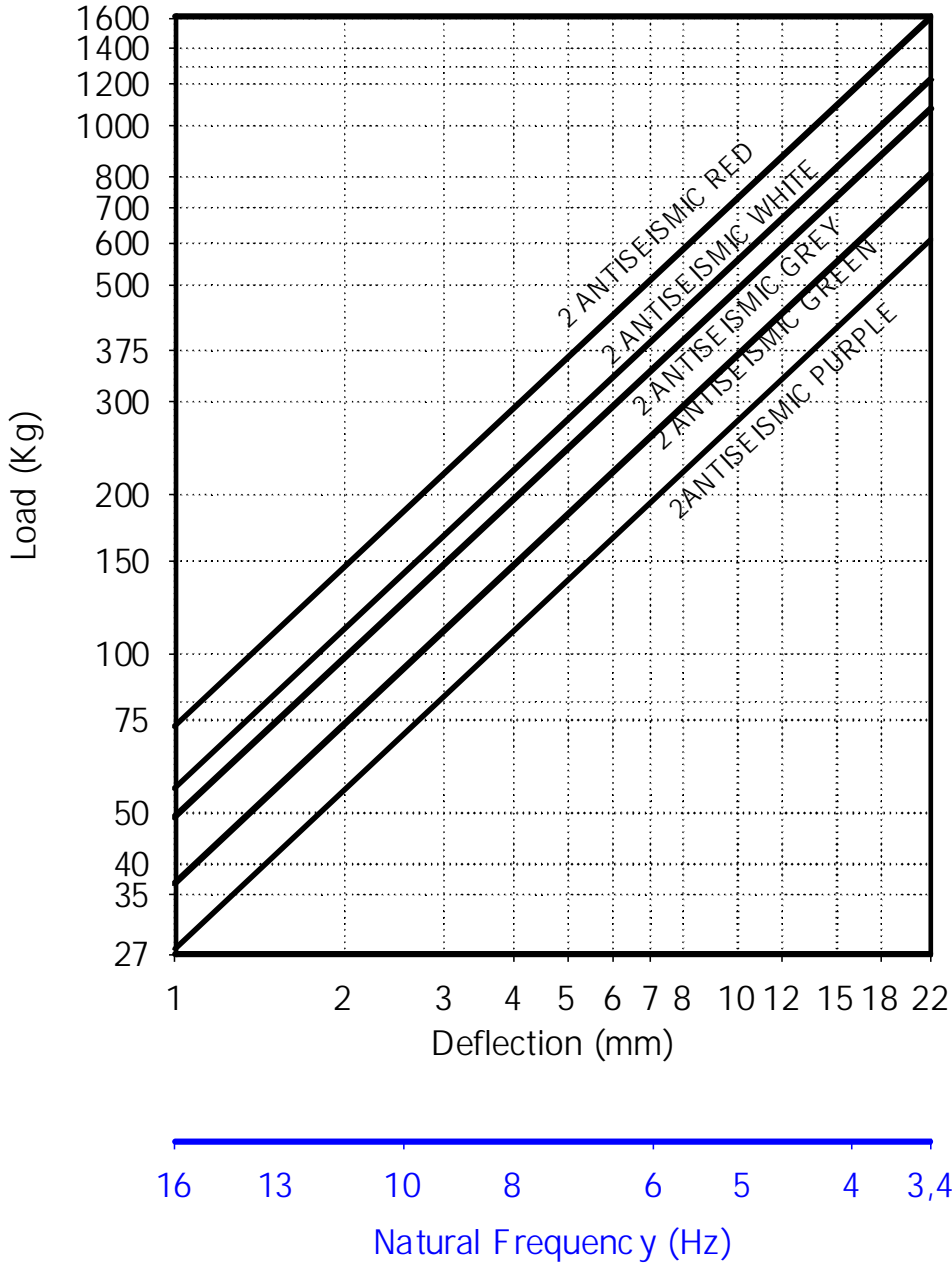

2 AMC ANTI-SEISMIC

ADVANTAGES



In addition to its resistance, these pieces offer the following advantages:

- **TRANSPORT SAFETY:** Vibrabsorber seismic brackets feature a locking device, so that the brackets are locked during the transport of the machine.
- **NOISE ISOLATION STRUCTURE:** The microcellular polyurethane Sylomer® pad these supports have under their base insulates the mid and high frequencies that are transmitted by the spring.