

# Akustikabsorber

## FD



Beige perforated PVC facing an M-1 class fireresistant absorbing polyurethane foam.

Measurements according to UNE-EN ISO 140-3 standard (December 1995)  
Acoustic Isolation of Construction Materials in Laboratory Measurements.  
Corresponds completely with ISO 140-3(1995) standard.  
Cancels and substitutes UNE 74-040/3 (1984) standard.  
Calculations according to NBCEA88.

Tipo	Codice	autoadesive	Rw (dB)	Peso (kg)
FD-15 plancha	26231	-	13	1,335
FD-15 A plancha	26233	✓	13	1,335
FD-25 plancha	26232	-	11	2,085
FD-25 A plancha	26234	✓	11	2,085

### CARATTERISTICHE TECNICHE

- **Composition**  
Beige perforated PVC facing an M-1 class fireresistant absorbing polyurethane foam.
- **Thicknesses**  
15mm | 25mm

### FORMATS

- **Sheets**  
1200x1000 mm  
15mm thick, 8 Sheets per box.  
25mm thick, 5 Sheets per box.
- **Rolls**  
Consult for roll manufacturing.

### APPLICAZIONI


Revestimiento interior de cabinas insonorizadas o de vehículos, buena absorción y absorbente con comportamiento ignífugo M-1.

# Akustikabsorber FD

## PROPRIETÀ ACUSTICHE

Transmission Loss (dB)

FD

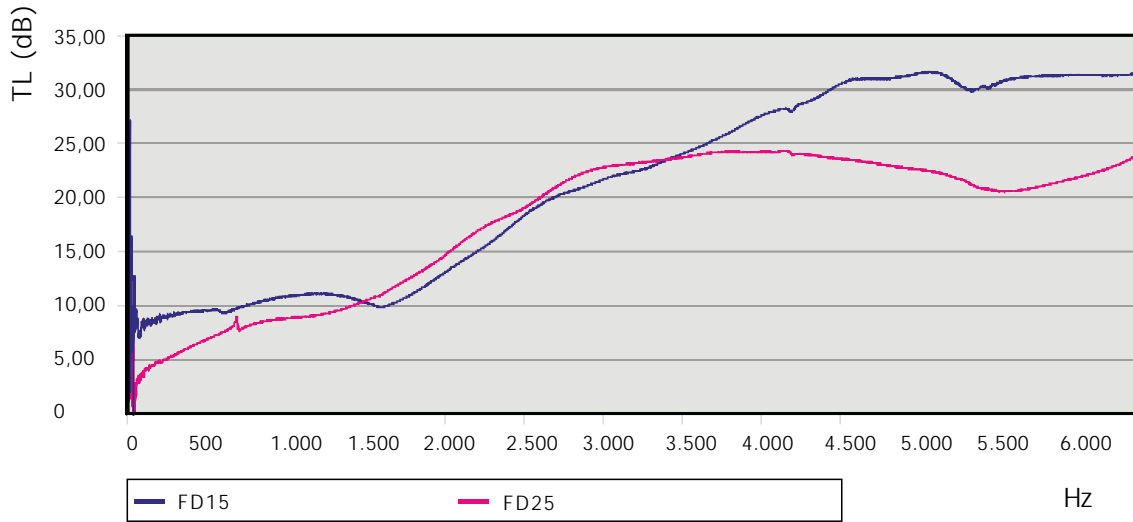

Absorption coefficient

FD

