

Akustikabsorber

PYRAMIDAL FIRE-RESISTANT

M-1 class fire-resistant melamine honeycomb foam.



Measurements according to UNE-EN ISO 140-3 standard (December 1995)
Acoustic Isolation of Construction Materials in Laboratory Measurements.
Corresponds completely with ISO 140-3(1995) standard.
Cancels and substitutes UNE 74-040/3 (1984) standard.
Calculations according to NBCEA88.

Tipo	Codice	autoadesive	Rw (dB)	Peso (kg.)
PIRAMIDAL IGNÍFUGO 30 plancha	26805	-	9	-
PIRAMIDAL IGNÍFUGO 30 plancha	26807	x	9	-
PIRAMIDAL IGNÍFUGO 50 plancha	26806	x	11	-
PIRAMIDAL IGNÍFUGO 50 plancha	26808	-	11	-

CARATTERISTICHE TECNICHE

— Composition

M-1 class fire-resistant melamine honeycomb foam.

— Thicknesses

30mm 50mm

FORMATS

— Sheets

1200x600 mm

APPLICAZIONI

Aislante térmico, comportamiento M-1 ignífugo, muy buen absorbente acústico y aspecto decorativo


Akustikabsorber

PYRAMIDAL FIRE-RESISTANT

PROPRIETÀ ACUSTICHE

Transmission Loss (dB)

PYRAMDAL FIRE-RESISTANT

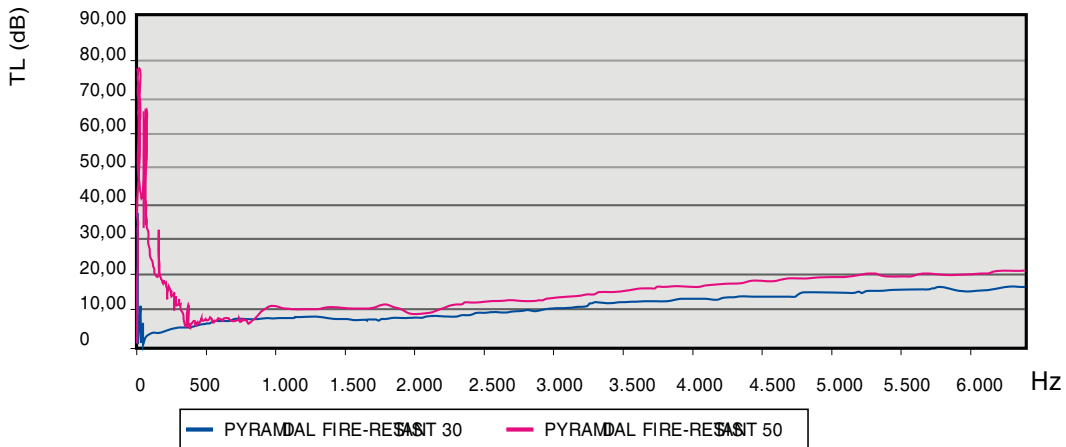

Absorption coefficient

PYRAMDAL FIRE-RESISTANT

