

PAVIABSORBER

Antiskid Mat and absorbent polyethylene closed cell foam.



Measurements according to UNE-EN ISO 140-3 standard (December 1995)
 Acoustic Isolation of Construction Materials in Laboratory Measurements.
 Corresponds completely with ISO 140-3(1995) standard.
 Cancels and substitutes UNE 74-040/3 (1984) standard.
 Calculations according to NBCEA88.

Tipo	Codice	autoadesive	Rw (dB)	Peso (kg)
PAVIABSORBER (PAV.CIR.+ MP + POLIETILENE)	26701	-	22	13
PAVIABSORBER A (PAV.CIR.+ MP + POLIETILENE)	26703	☐	22	13

CARATTERISTICHE TECNICHE

— Composition

Antiskid Mat, absorbent polyethylene foam and visco elastic heavy mass of 5kg / m2 interleaved.

— Thicknesses

15mm

FORMATS

— Sheets

1200x1000 mm


APPLICAZIONI

Aislamiento de ruido aéreo, alfombras para cabinas de tractores, maquinaria de construcción...

PROPRIETÀ ACUSTICHE

Transmission Loss (dB)

PAVIABSORBER

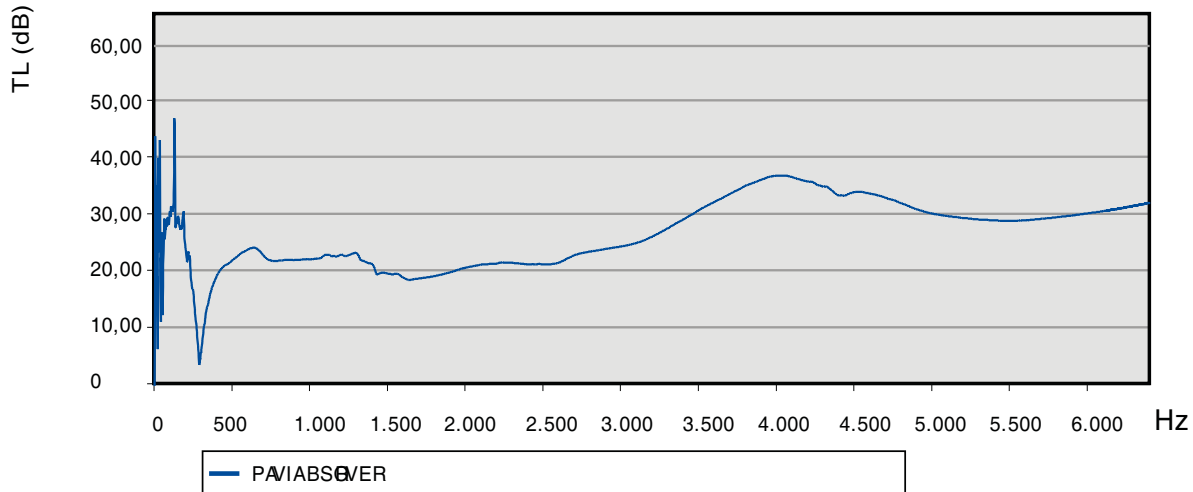

Absorption coefficient

PAVIABSORBER

