


# Akustikabsorber

## PD BEIGE

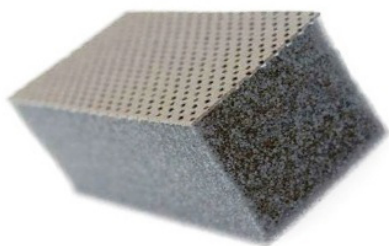

Perforated beige coloured PVC facing and absorbing polyurethane foam.

Measurements according to UNE-EN ISO 140-3 standard (December 1995)  
Acoustic Isolation of Construction Materials in Laboratory Measurements.  
Corresponds completely with ISO 140-3(1995) standard.  
Cancels and substitutes UNE 74-040/3 (1984) standard.  
Calculations according to NBCEA88.

Tipo	Codice	autoadesive	Rw (dB)	Peso (kg)
PD-15 plancha	26003	-	10	1,113
PD-15 A plancha	26071	☐	10	1,113
PD-15 rollo	26011	-	10	1,113
PD-15 A rollo	26126	☐	10	-
PD-25 plancha	26006	-	8	1,415
PD-25 A plancha	26072	☐	8	1,415
PD-25 rollo	26013	-	8	1,415
PD-25 A rollo	26029	☐	8	-
PD-40 plancha	26009	-	18	1,868
PD-40 A plancha	26073	☐	18	1,868
PD-40 rollo	26015	-	18	1,868
PD-40 A rollo	26074	☐	18	1,868

### CARATTERISTICHE TECNICHE

#### — Composition

Perforated beige coloured PVC facing and absorbing polyurethane foam.

#### — Thicknesses

15mm 25mm 40mm

### FORMATS

#### — Sheets

1200x1000 mm  
15mm thick, 8 Sheets per box.  
25mm thick, 5 Sheets per box.  
40mm thick, 3 Sheets per box.

#### — Rolls

15mm thick, 1500mm wide x approx. 25m long  
25mm thick, 1500mm wide x approx. 25m long  
40mm thick, 1500mm wide x approx. 20m long

### APPLICAZIONI

Revestimiento interior de cabinas insonorizadas o de vehículos, buena absorción.

# Akustikabsorber

## PD BEIGE

### PROPRIETÀ ACUSTICHE

