

DIABOLO MOUNTS TYPE A



The AMC Mekanocaucho® Bobbins are devices for making elastic anchorings or fixings. They can be used in a wide variety of applications, particularly for elastic suspensions and anti vibration isolation of machines and different mechanical organs. They are made of a block of rubber with two parallel metal parts at the end which enable it to be fixed either by screws in the "C" model or with nuts in the "A" model or a combination of both in the "B" model. The rubber block may be cylindrical in cases requiring greater load capacity or as a diabolo when greater elasticity is required in all directions.

TECHNICAL CHARACTERISTICS


Depending on the size of the rubber block, the AMC Mekanocaucho® bobbing has more or less elasticity, which is greater particularly in all directions perpendicular to its axis (shear). The AMC Mekanocaucho® bobbing thus makes it possible to make joins which permit major relative movements, up to several millimetres (in the case of heat expansion, chassis deformations, etc.). The AMC Mekanocaucho® bobbing serves very well for the vibration isolation of machines where the vibrations are perpendicular to their axis, unless these stresses are too much when applied in this direction.

APPLICATIONS

The AMC Mekanocaucho® bobbins are particularly suitable for installation on small motor-pumps, motor-ventilators, driers, sieves, compactors, washing machines, electrical motors, on-board control panels, measuring apparatuses, control cabinets, microphones, fluorescent tubes, etc.



DRAWINGS

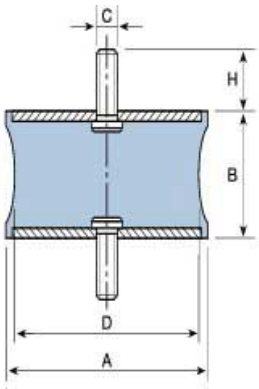

DIMENSIONS

Type	A (mm)	B (mm)	D (mm)	H (mm)	COMPRESSION LOAD Max. daN	COMPRESSION DEFLECT. mm	SHEAR LOAD Max. daN	SHEAR DEFLECT. mm	C (mm)	Weight (kg)	Code
F.M	10	10	8	3	2,5	1,2	0,4	1,5	M-4	0,007	129016
F.000N	12	12	8	10	4	1,5	0,4	1,5	M-5	0,006	129001
F.00N	20	19	13,5	16,5	12	2,5	3	5	M-6	0,017	129002
F.0N	40	28	19	25	30	5	2,5	4,5	M-10	0,093	129004
									M-8	0,081	128001
F.3	30	25	24	20	40	5	4	4,5	M-8	0,08	129003
F.1	60	44	24	20	40	5	7	5	M-8	0,174	129007
F.9	40	30	26	25	45	3	4	4,5	M-8	0,08	129005
F.7	44	42	25	25	50	6	9	6	M-8	0,094	129006
F.2	60	44	34	20	75	5	12	6	M-8	0,188	129008
				25					M-10	0,188	129013
F.8	60	36	37	25	100	7	20	8	M-10	0,205	129010
F.4	60	60	50	25	150	8	30	10	M-10	0,279	129009
F.6	95	76	80	45	400	9,5	70	8	M-16	0,952	129012
F.5	80	70	70	35	300	9,5	55	9,8	M-14	0,667	129011

OPERATION AND ASSEMBLY



Its elasticity is much greater in all the directions parallel to the armatures than in the perpendicular direction. The rubber works based on compression or shear depending on the direction it is placed at installation time. This direction is made according to the use and the objective. It is therefore installed with nuts or screws depending on the model chosen, with one part attached to the fixed chassis and the other to the machine to be suspended.

ADVANTAGES



- Easy to install.
- High elasticity (particularly transversal).
- Economical.