


Rubber Metal anti vibration mounts


CASQUILLO ROSCADO PARA TUBO REDONDO

AMC
MECANOCAUCHO
RUBBER AND
VIBRATION
SOLUTIONS


Casquillos roscados para tubo redondo




 **AMC MECANOCAUCHO**
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain

 Tel.: +34 943 69 61 02
Fax: +34 943 69 62 19

 sales@amcsa.es

 www.mecanocaucho.com
www.akustik.com

DRAWINGS

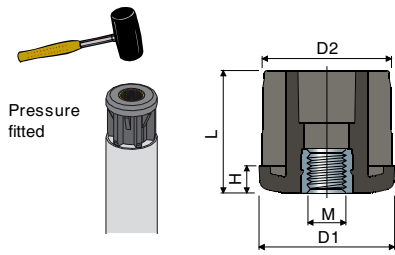

DIMENSIONS

Type	D1 (mm)	D2 (mm)	H (mm)	L (mm)	M	Weight (kg)	Max. Load (kg)	TUBE THICKNESS	Code
ROUND TUBE	30	28	6	31	M10	0,022	500	3,55	159581
	30	28	6	31	M12	0,02	550	3,55	159582
	30	28	8	31	M14	0,03	600	3,55	159583
	38	35	8	38	M10	0,035	500	3,55	159584
	38	35	8	38	M12	0,032	550	4	159585
	38	35	8	38	M14	0,042	600	4	159586
	42	39	8	38	M12	0,039	750	4	159587
	42	39	8	38	M14	0,049	800	4	159588
	42	39	8	38	M16	0,044	850	4	159589
	48	45	10	45	M10	0,059	750	4	159590
	48	45	10	45	M12	0,057	800	4	159591
	48	45	10	45	M14	0,067	850	4	159592
	48	45	10	45	M16	0,061	900	4	159593
	48	45	10	45	M20	0,076	950	4,4	159594
	50	47	10	45	M12	0,059	800	4,4	159595
	50	47	10	45	M14	0,069	850	4,4	159596
	50	47	10	45	M16	0,063	900	4,4	159597
	50	47	10	45	M20	0,078	950	4,4	159598
	60	57	12	52	M14	0,102	850	5,2	159599
	60	57	12	52	M16	0,096	900	5,2	159600
	60	57	12	52	M20	0,111	1000	5,2	159601
	60	56	12	52	M16	0,095	900	5,2	159602
	60	56	12	52	M20	0,103	950	5	159603
	60	55	12	52	M14	0,102	850	5,6	159604
60	55	12	52	M16	0,096	900	5,6	159605	
60	55	12	52	M20	0,111	950	5,6	159606	