

Anti vibration
mounts

6V-SR



This range of mounts comprises:

A spring high elasticity and very low natural frequency

An incorporated levelling system

A non-slip rubber base

A spare Sylomer to isolate mid and high frequencies comes standard


TECHNICAL CHARACTERISTICS

The mounts are able to reach low natural frequencies from 3 to 5 Hz. The spring combined with sylomer® is able to provide high isolation at low and medium frequencies.

The curves are showing the deflection and natural frequencies according to the load of the spring. Temperature working range from -30 to 70°. Short term higher temperatures are possible.



DRAWINGS

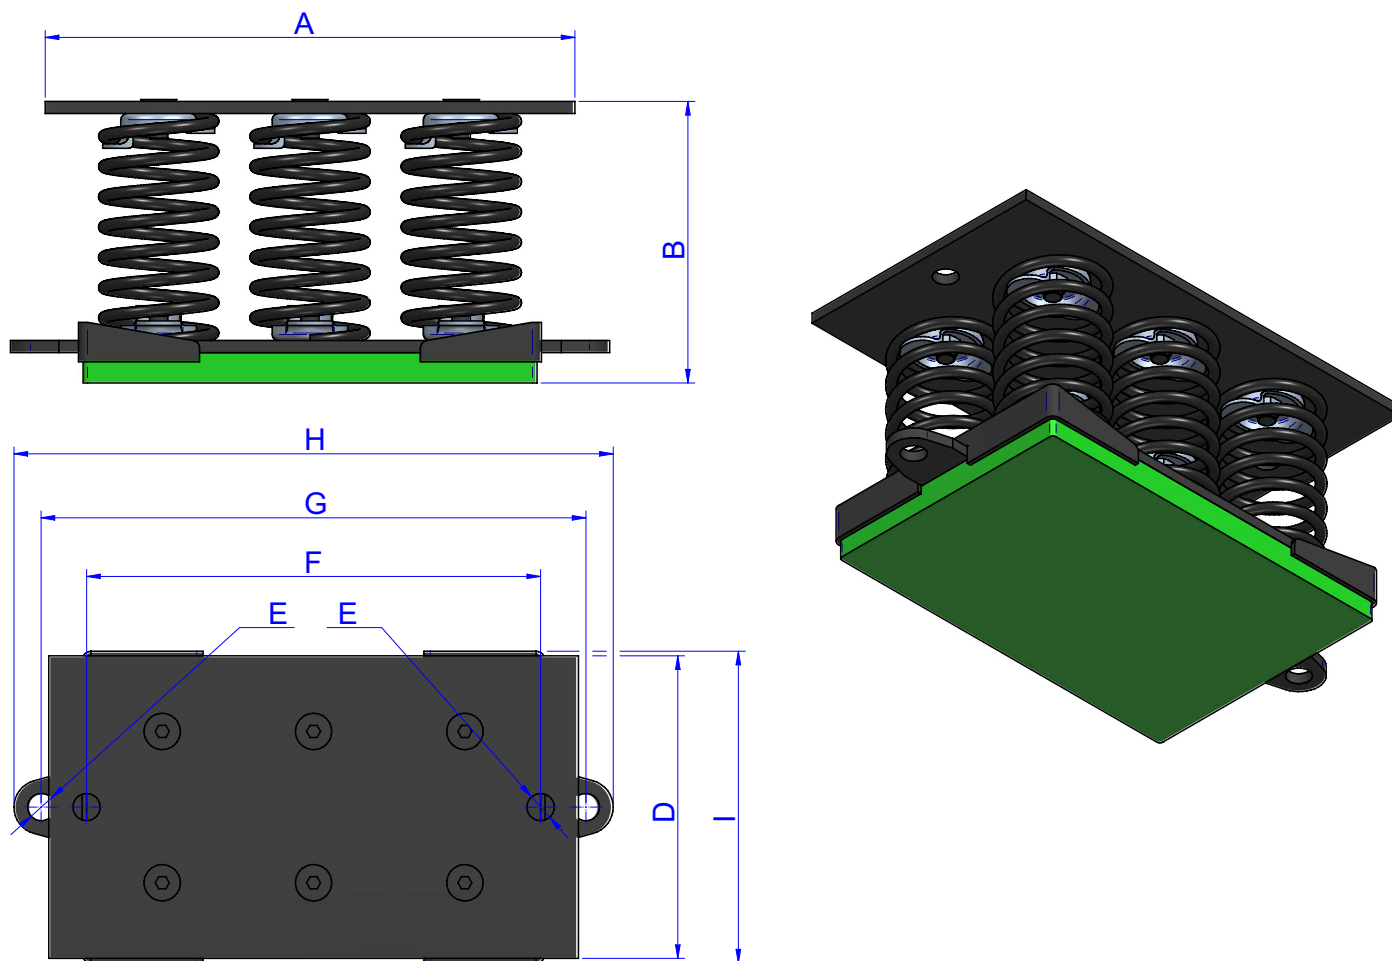


DIMENSIONS

Type	Spring color	A (mm)	B (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Load (kg)	Weight (kg)	Code
6V-SR-1200	BLACK	350	180	200	18	300	360	396	206	1200	0	21330
6V-SR-2400	BLACK	350	180	200	18	300	360	396	206	2400	0	21331
6V-SR-3900	BLACK	350	180	200	18	300	360	396	206	3900	19,75	21101
6V-SR-4800	BLACK	350	180	200	18	300	360	396	206	4800	19,9	21102
6V-SR-6000	BLACK	350	180	200	18	300	360	396	206	6000	21,73	21103
6V-SR-7200	BLACK	350	180	200	18	300	360	396	206	7200	22,174	21104

Elastical properties

LOAD DEFLECTION GRAPH
AMC MECANOCAUCHO® 6V-SR

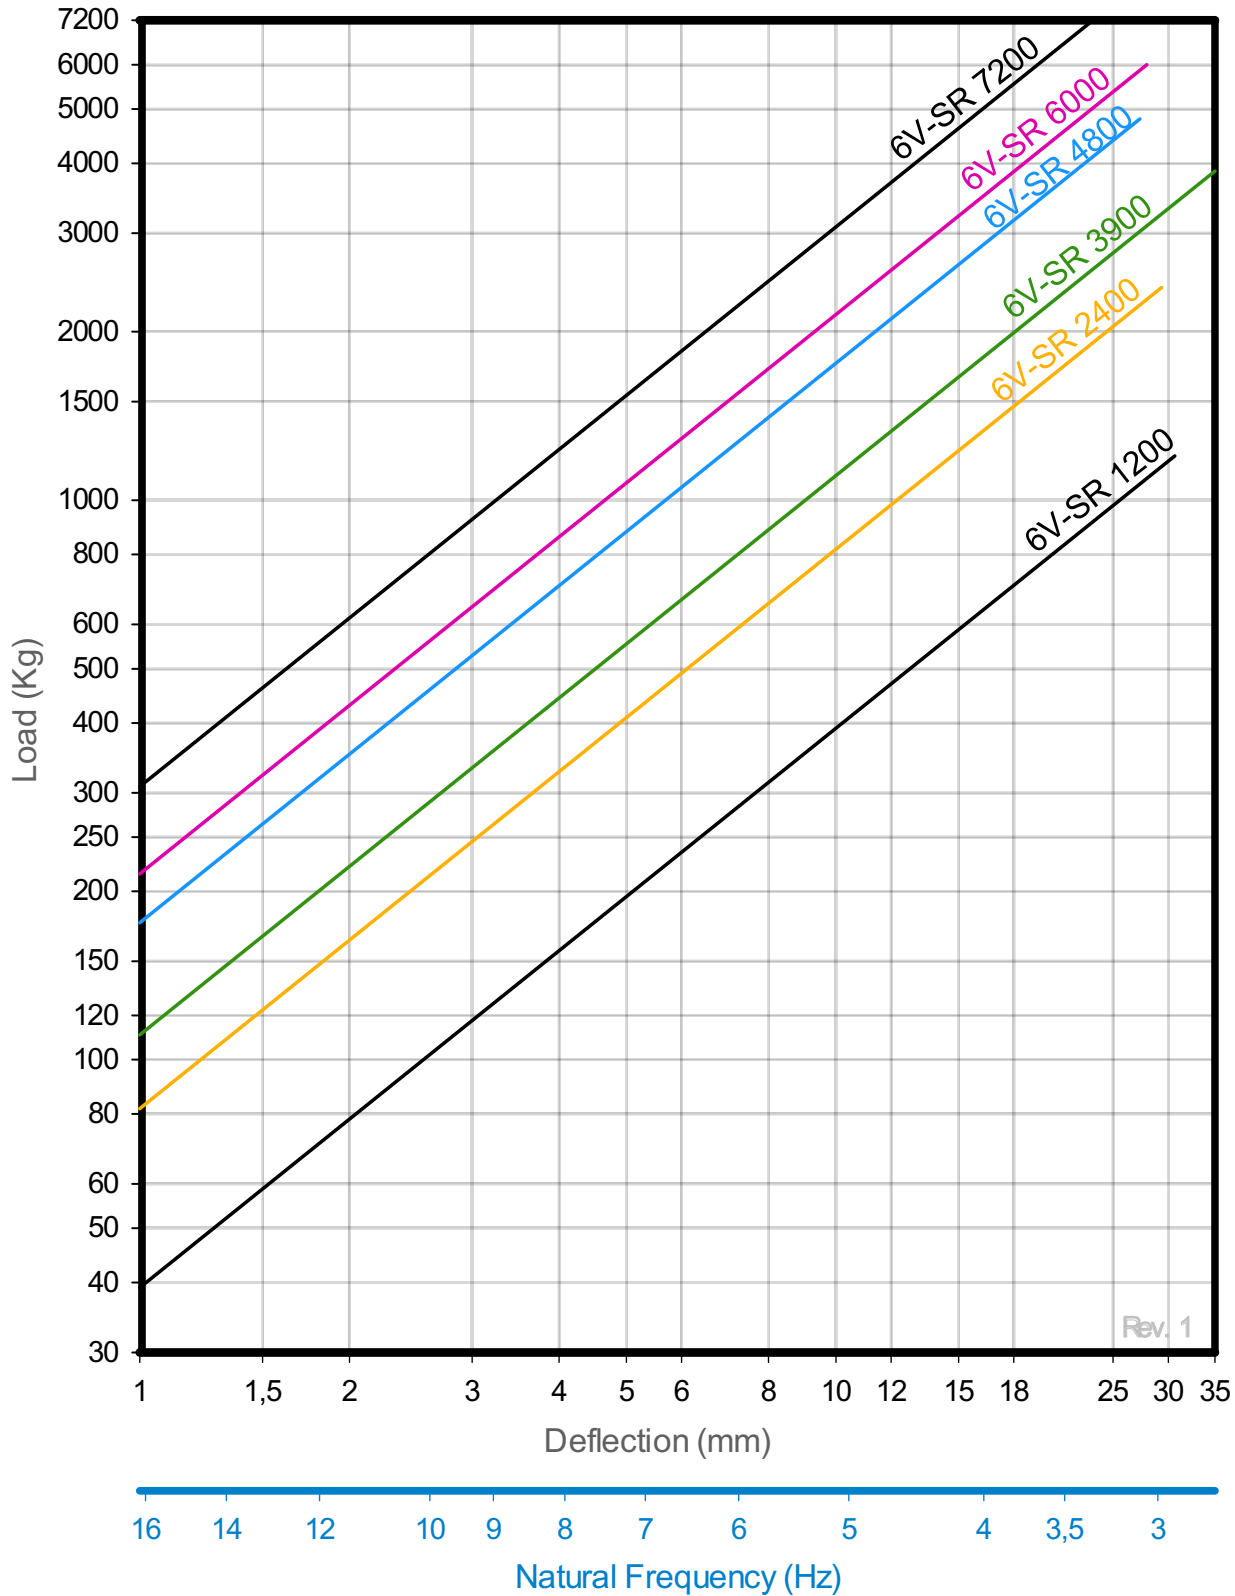

Rev. 1