

Anti vibration
mounts

3V-SH



This range of mounts comprises:

A spring high elasticity and very low natural frequency

An incorporated levelling system

A non-slip rubber base

A spare Sylomer to isolate mid and high frequencies comes standard


TECHNICAL CHARACTERISTICS

The mounts are able to reach low natural frequencies from 2 to 5 Hz. The spring combined with sylomer® is able to provide high isolation at low and medium frequencies.

The curves are showing the deflection and natural frequencies according to the load of the spring. Temperature working range from -30 to 70°. Short term higher temperatures are possible.



DRAWINGS

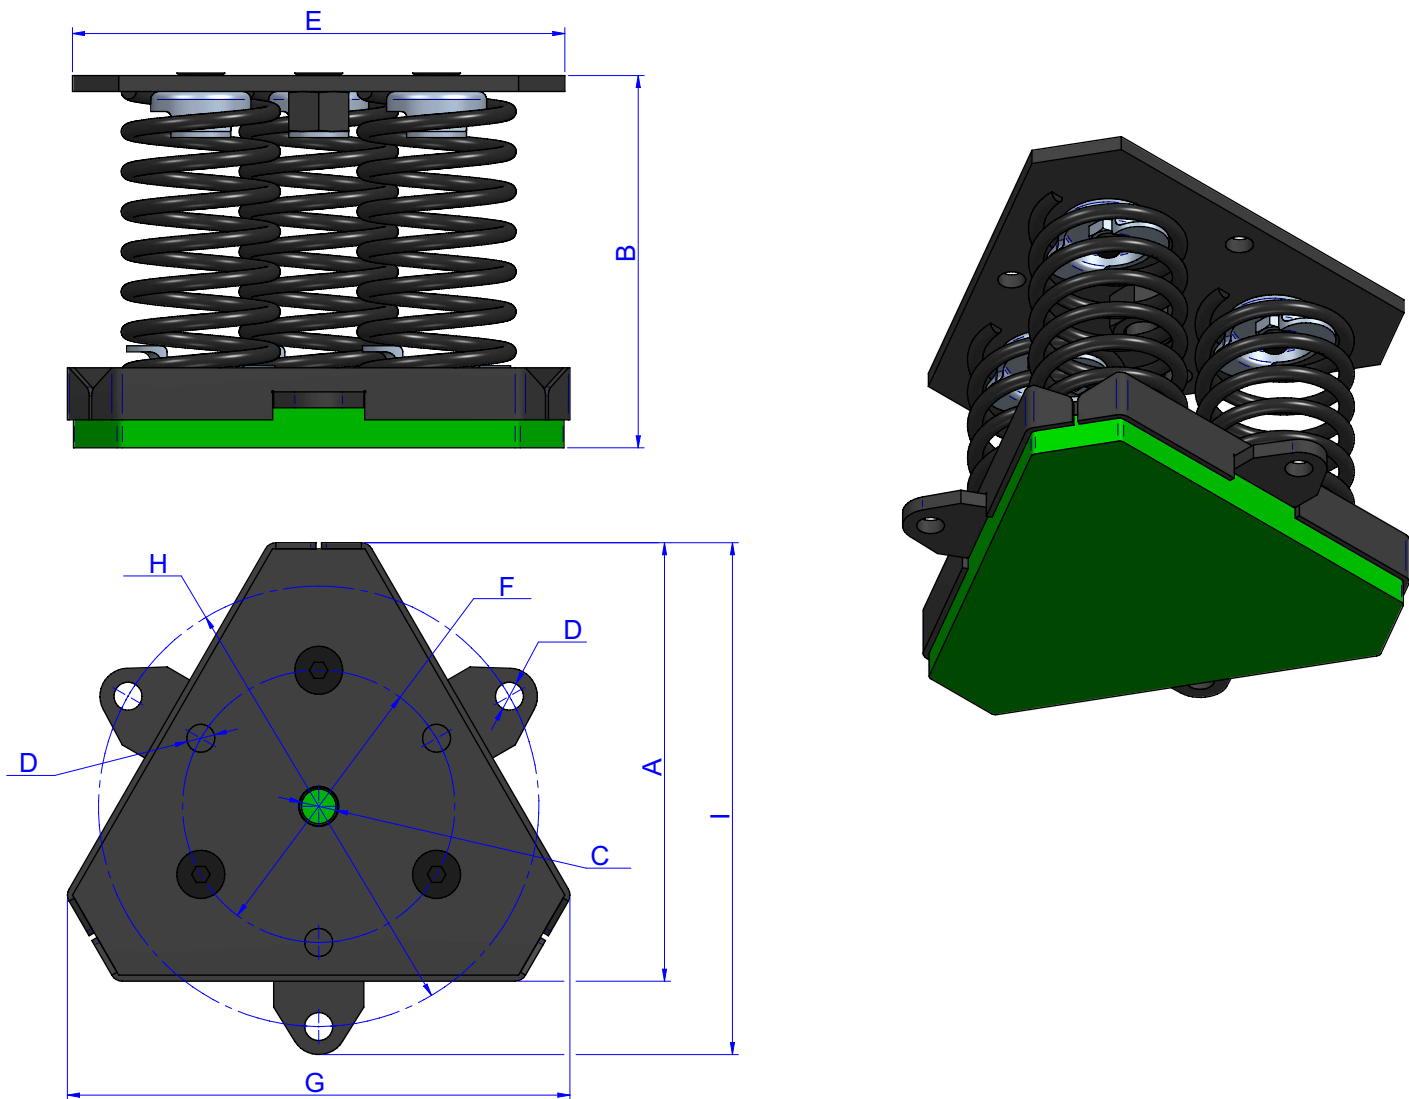


DIMENSIONS

Type	Spring color	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Load (kg)	Weight (kg)	Code
3V-SH 201	BLUE	219	180	M20	14	246	136	251	220	255,7	201	4,85	21020
3V-SH 285	WHITE	219	180	M20	14	246	136	251	220	255,7	285	4,85	21021
3V-SH 369	BLACK	219	180	M20	14	246	136	251	220	255,7	369	5,25	21022
3V-SH 519	BEIGE	219	180	M20	14	246	136	251	220	255,7	519	4,85	21023
3V-SH 669	RED	219	180	M20	14	246	136	251	220	255,7	669	5,85	21024
3V-SH 1005	GREY	219	180	M20	14	246	136	251	220	255,7	1005	4,85	21025
3V-SH 1338	GREEN	219	180	M20	14	246	136	251	220	255,7	1338	6,91	21026
3V-SH 2100	BROWN	219	180	M20	14	246	136	251	220	255,7	2100	11	21029

Elastical properties

LOAD DEFLECTION GRAPH
AMC MECANOCAUCHO® 3V-SH

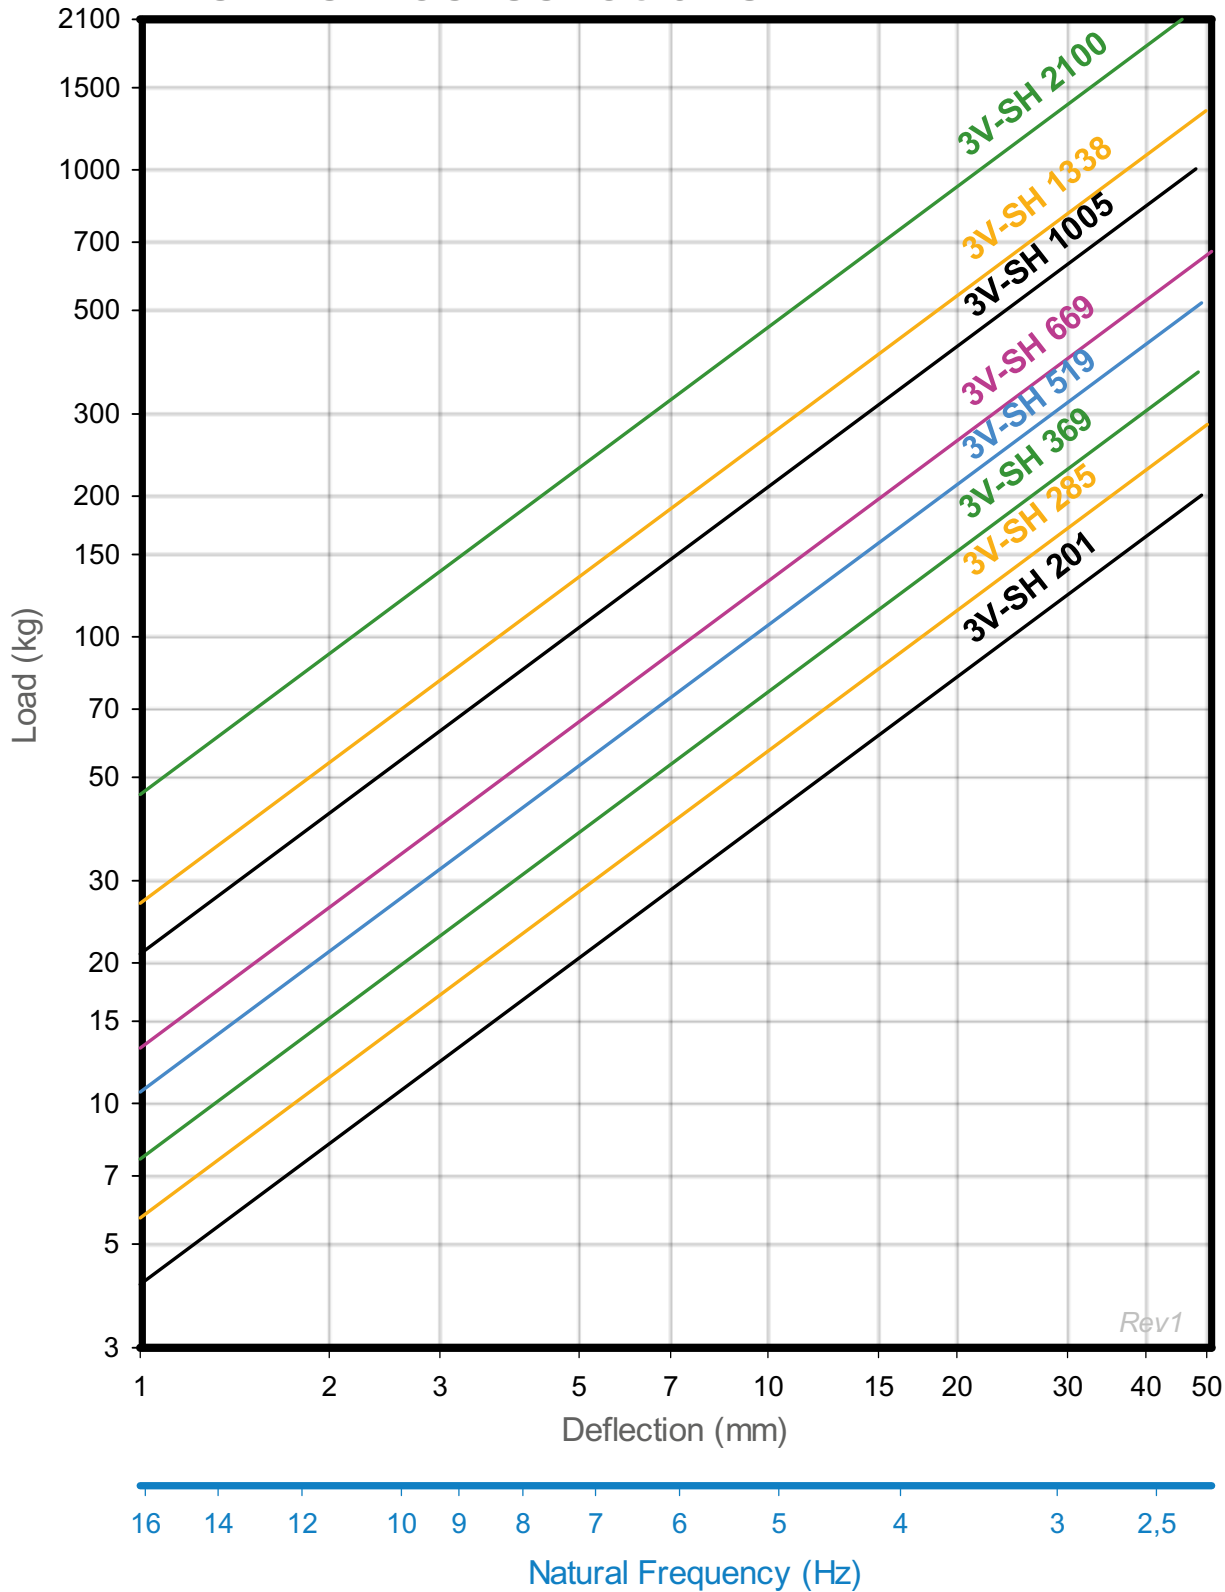

Rev1