

Anti vibration
mounts

6V-SH



This range of mounts comprises:

A spring high elasticity and very low natural frequency

An incorporated levelling system

A non-slip rubber base

A spare Sylomer to isolate mid and high frequencies comes standard


TECHNICAL CHARACTERISTICS

The mounts are able to reach low natural frequencies from 2 to 5 Hz. The spring combined with sylomer® is able to provide high isolation at low and medium frequencies.

The curves are showing the deflection and natural frequencies according to the load of the spring. Temperature working range from -30 to 70°. Short term higher temperatures are possible.



DRAWINGS

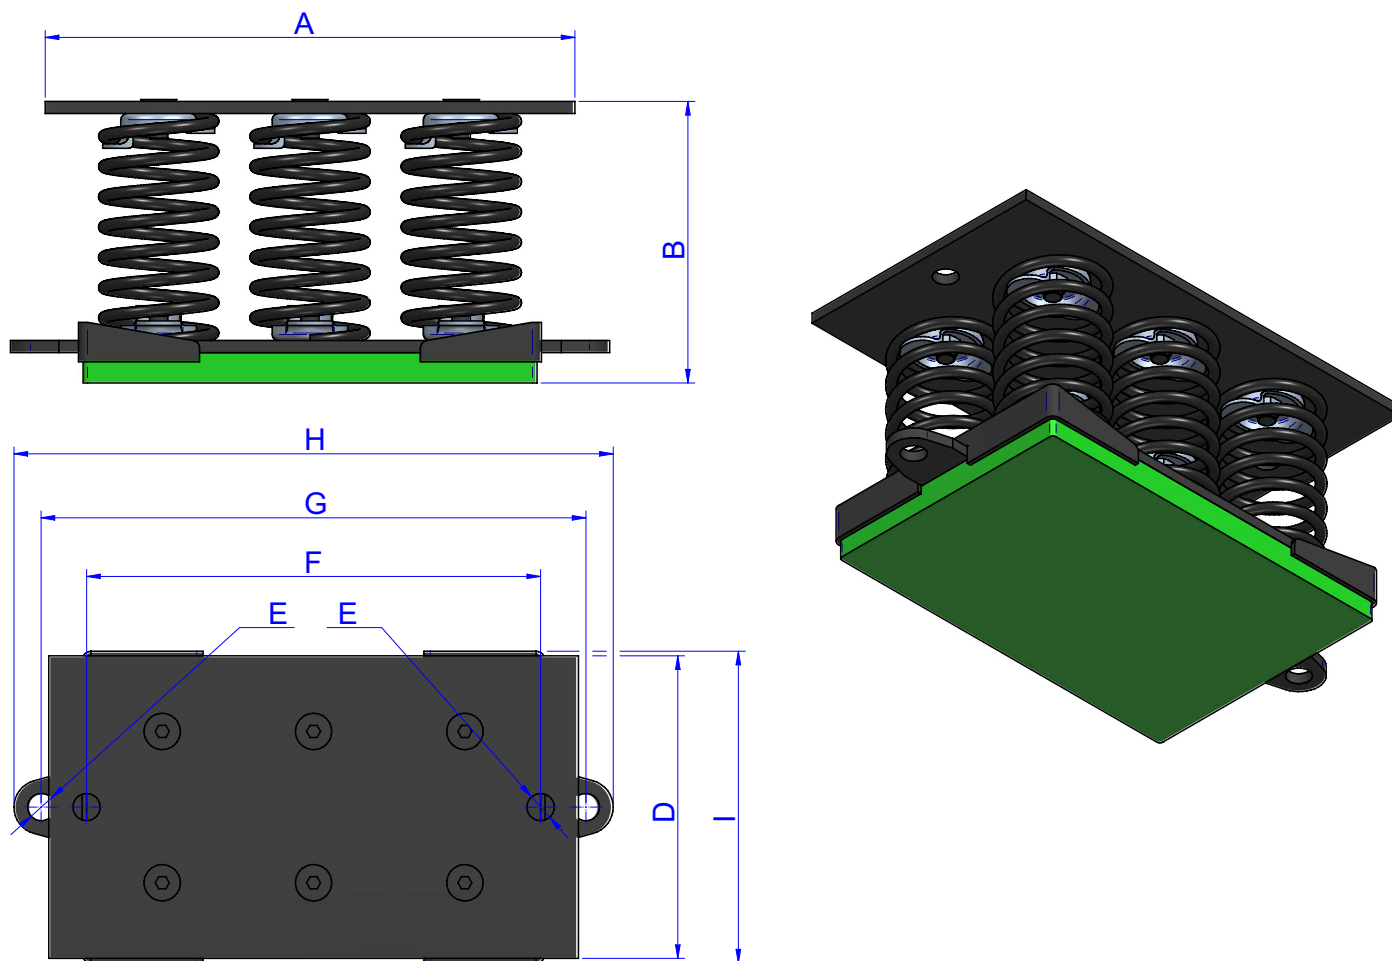

DIMENSIONS

Type	Spring color	A (mm)	B (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Load (kg)	Weight (kg)	Code
6V-SH 402	BLUE	350	180	200	18	300	360	396	206	402	13,87	21050
6V-SH 570	WHITE	350	180	200	18	300	360	396	206	570	14,212	21051
6V-SH 738	BLACK	350	180	200	18	300	360	396	206	738	14,356	21052
6V-SH 1038	BEIGE	350	180	200	18	300	360	396	206	1038	14,896	21053
6V-SH 1338	RED	350	180	200	18	300	360	396	206	1338	17,122	21054
6V-SH 2010	GREY	350	180	200	18	300	360	396	206	2010	18,328	21055
6V-SH 2676	GREEN	350	180	200	18	300	360	396	206	2676	19,924	21056
6V-SH 4200	BROWN	350	180	200	18	300	360	396	206	4200	19,924	21059

Elastical properties

LOAD DEFLECTION GRAPH
AMC MECANOCAUCHO® 6V-SH

