


TSR 300X300 ANTI VIBRATION MOUNTS




The AMC-MECANOCAUCHO® TSR type anti vibration mounts include a microcellular and resilient polyurethane compound for anti-vibration purposes called Sylomer®. This Sylomer® is oil resistant and with a temperature range of -30°C/+70°C.

In order to match the application, 6 different densities are supplied for a wide range of loads.

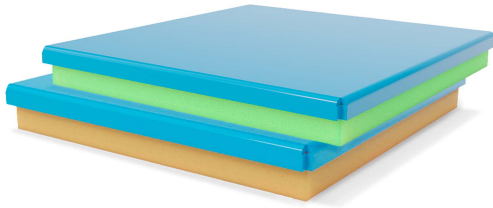

DRAWINGS

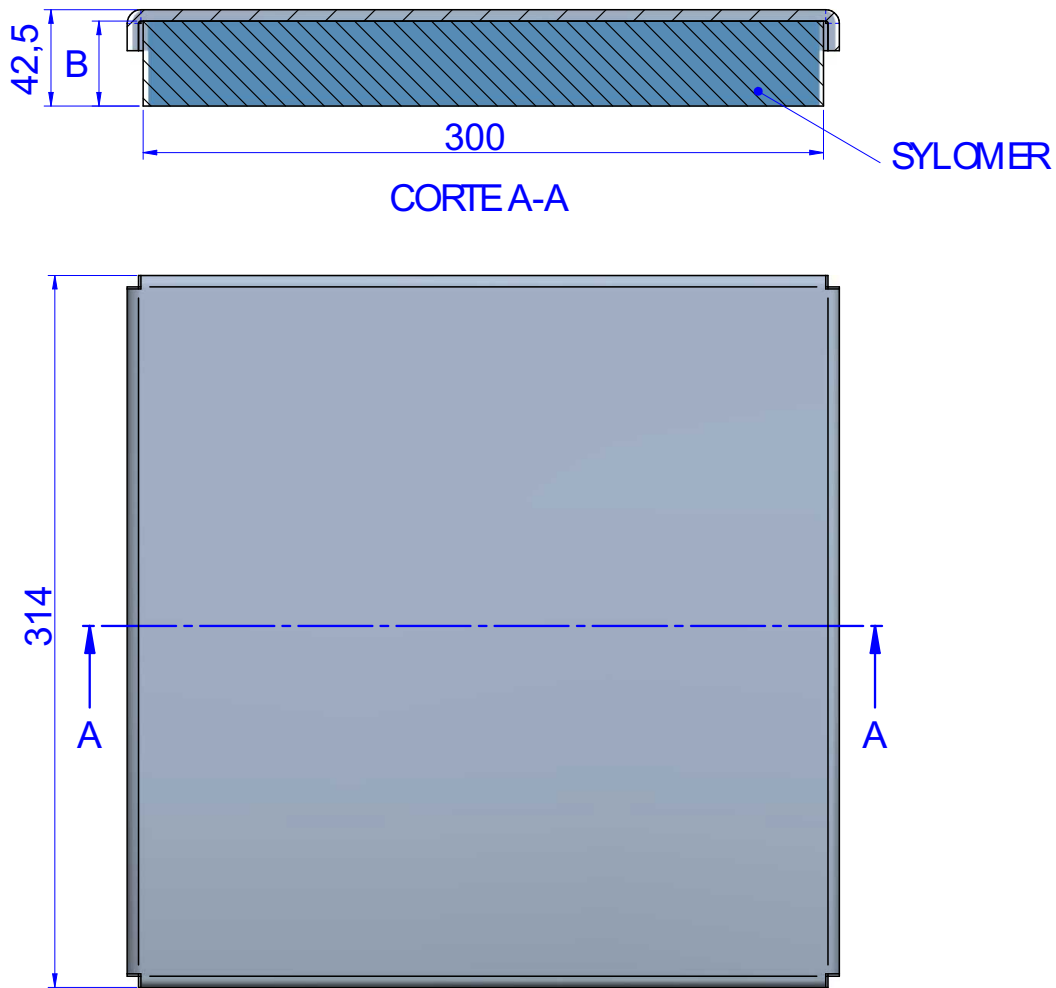


DIMENSIONS

Type	B (mm)	Weight (kg)	LOAD kg MIN	LOAD kg MAX	FREQ. Hz. MIN Load	FREQ. Hz. MAX Load	Code
TSR 300X300 SR28	37,5	5,08	0	253	-	9,99	157162
TSR 300X300 SR42	37,5	5,08	254	380	11,79	9,64	157163
TSR 300X300 SR55	37,5	5,08	381	500	10,65	9,30	157164
TSR 300X300 SR110	37,5	5,08	501	985	13,20	9,41	157165
TSR 300X300 SR220	37,5	5,08	986	1950	12,24	8,71	157166
TSR 300X300 SR450	37,5	5,08	1951	3900	12,45	8,81	157167

Elastical properties

NATURAL FREQUENCY
TSR 300X300 + SYLOMER

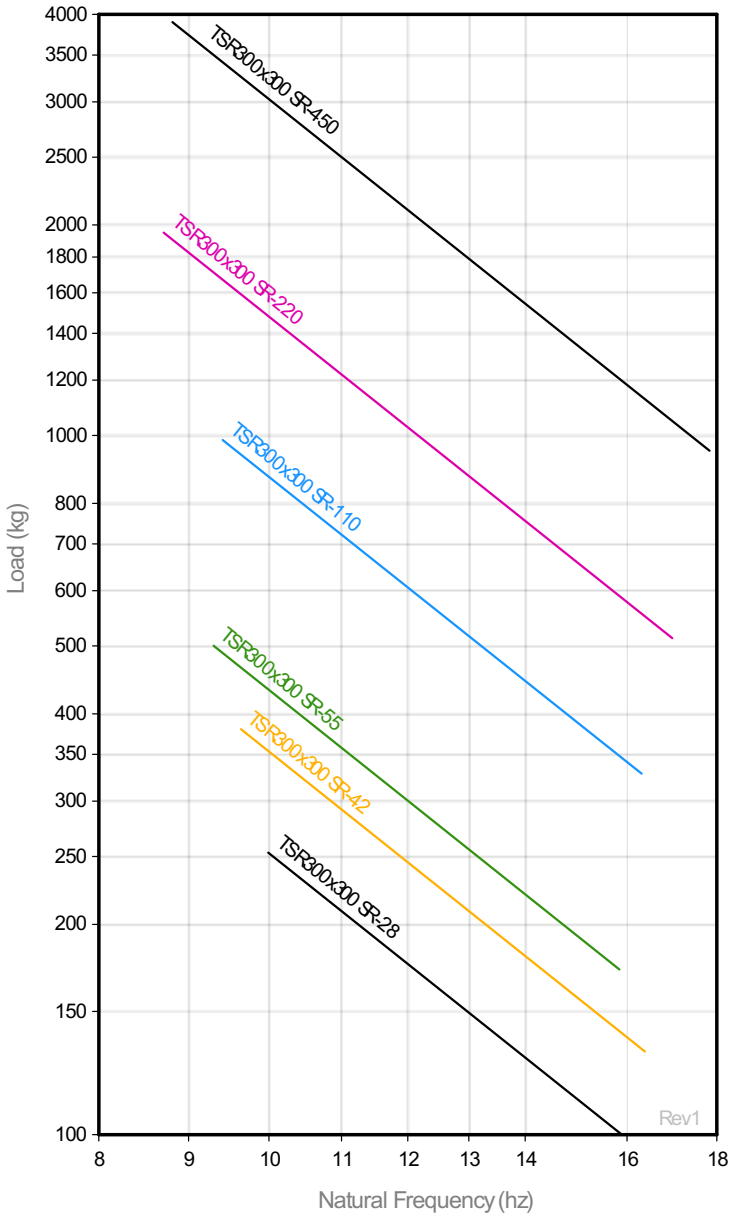

LOAD DEFLECTION
TSR 300X300 + SYLOMER

