




# AKUSTIK 1 + SYLOMER®

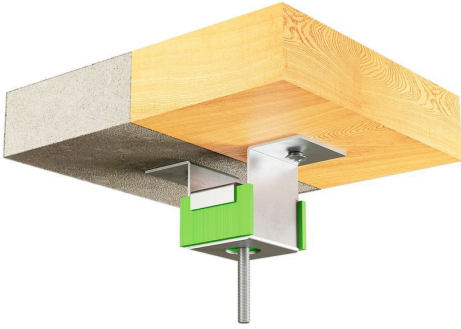

These acoustic hangers have been conceived for the suspension of false ceilings, vibrating pipelines and machinery that has to be suspended.


The excellent properties of the Sylomer® microcellular polyurethane material achieve elevated isolation values as opposed to other mounts that use rubber or cork, or a combination of both. These antivibration mounts are manufactured in two special mixes of Sylomer® to adapt better to the load of each application.

A great variety of fixing metal armors and elements facilitate the installation and to adapt better to each type of job. Their rugged metal parts can withstand tensile stresses from 650Kg to 1000Kg. They are supplied with an anticorrosive treatment that can withstand the toughest environments.



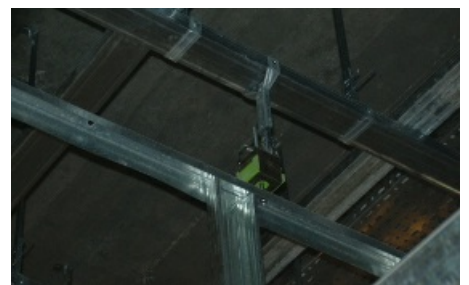
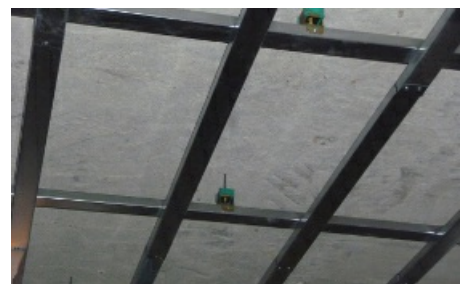


DRAWINGS

- 15
- 30
- 50
- 75


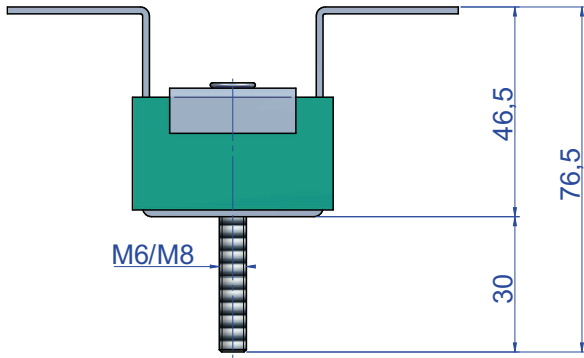


DIMENSIONS





	Type	SUMMARY	LOAD kg MAX	M	Weight (kg)	Code
	Akustik 1 + Sylomer®15 Type A	Metal armor of the Akustik 1 secured to the ceiling with two holes and an male fixing type (Type A)	15	M6	0,133	23651
				M8	0,141	23699
	Akustik 1 + Sylomer®30 Type A	Metal armor of the Akustik 1 secured to the ceiling with two holes and an male fixing type (Type A)	30	M6	0,133	23501
				M8	0,144	23700
	Akustik 1 + Sylomer®50 Type A	Metal armor of the Akustik 1 secured to the ceiling with two holes and an male fixing type (Type A)	50	M6	0,133	23502
				M8	0,133	23272
	Akustik 1 + Sylomer®75 Type A	Metal armor of the Akustik 1 secured to the ceiling with two holes	75	M6	0,146	23517
				M8	0,146	23273

DRAWINGS

- 15
- 30
- 50
- 75

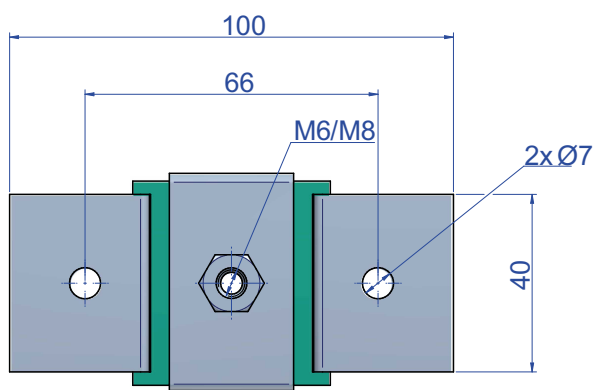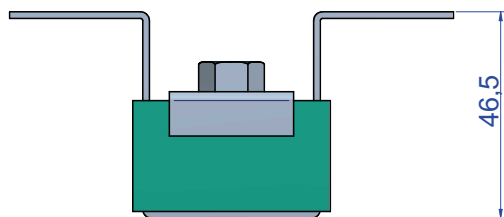


DIMENSIONS

	Type	SUMMARY	LOAD kg MAX	M	Weight (kg)	Code
	Akustik 1 + Sylomer®15 Type B	Metal armor of the Akustik 1 secured to the ceiling by a welded nut.	15	M6	0,125	23652
				M8	0,125	23653
	Akustik 1 + Sylomer®30 Type B	Metal armor of the Akustik 1 secured to the ceiling by a welded nut.	30	M6	0,125	23509
				M8	0,125	23603
	Akustik 1 + Sylomer®50 Type B	Metal armor of the Akustik 1 secured to the ceiling by a welded nut.	50	M6	0,125	23520
				M8	0,125	23880
	Akustik 1 + Sylomer®75 Type B	Metal armor of the Akustik 1 secured to the ceiling by a welded nut.	75	M6	0,134	23525
				M8	0,12	23604

Elastical properties

LOAD DEFLECTION GRAPHS

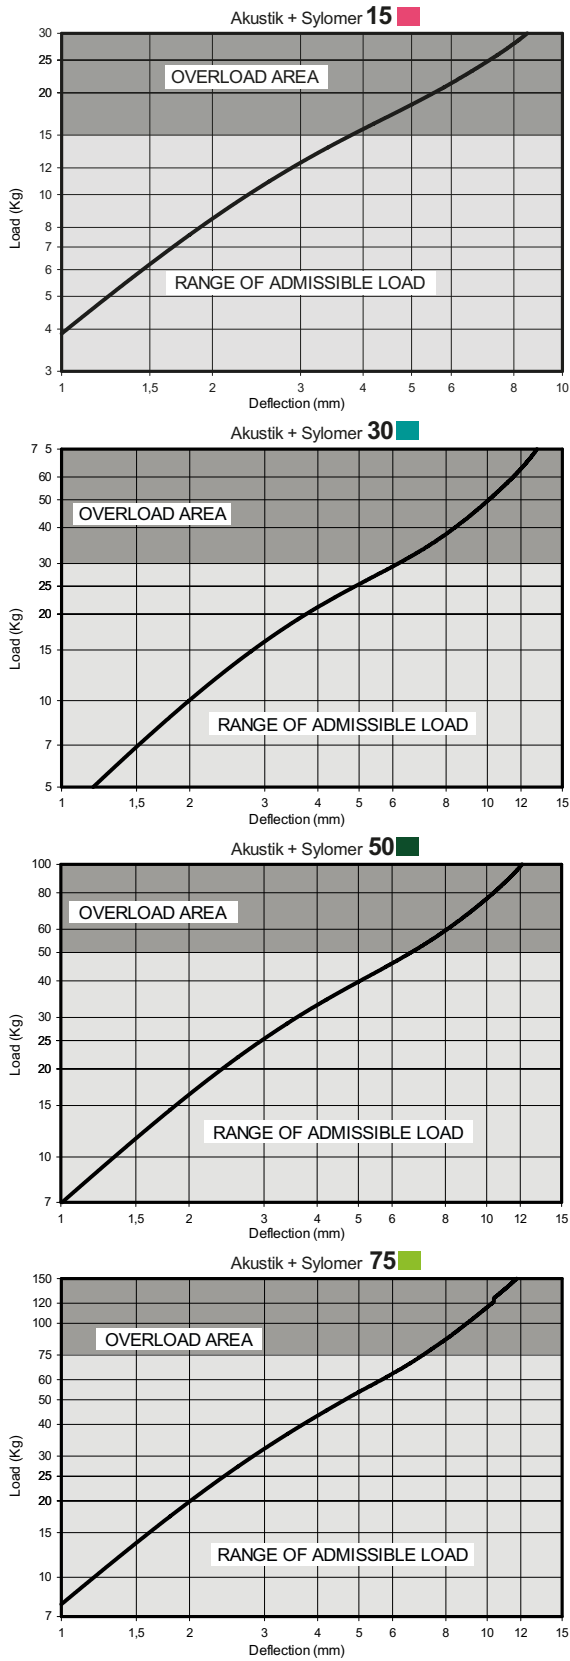

NATURAL FREQUENCY GRAPHS

