

Akustikabsorber

FI



Fiberglass facing and M-1 class fireresistant absorbing polyurethane foam.

Measurements according to UNE-EN ISO 140-3 standard (December 1995)
Acoustic Isolation of Construction Materials in Laboratory Measurements.
Corresponds completely with ISO 140-3(1995) standard.
Cancels and substitutes UNE 74-040/3 (1984) standard.
Calculations according to NBCEA88.

Type	Code	SELF-ADHESIVE	Rw (dB)	Weight (kg.)
FI-15 sheet	26206	-	22	1,335
FI-15 A sheet	26201	x	22	1,335
FI-25 sheet	26207	-	23	2,085
FI-25 A sheet	26205	x	23	2,085

TECHNICAL CHARACTERISTICS

— Composition

Fiberglass facing and M-1 class fireresistant absorbing polyurethane foam.

— Thicknesses

15mm 25mm

FORMATS

— Sheets

1200x1000 mm
15mm thick, 8 Sheets per box.
25mm thick, 5 Sheets per box.

— Rolls

Consult for roll manufacturing.

APPLICATIONS

Thermal insulation, M-1 class fire-resistant behaviour, good resistance to hydrocarbon damage and not very good acoustic absorber but good isolator.


Akustikabsorber

FI

ACOUSTIC PROPERTIES

Transmission Loss (dB)

FAI

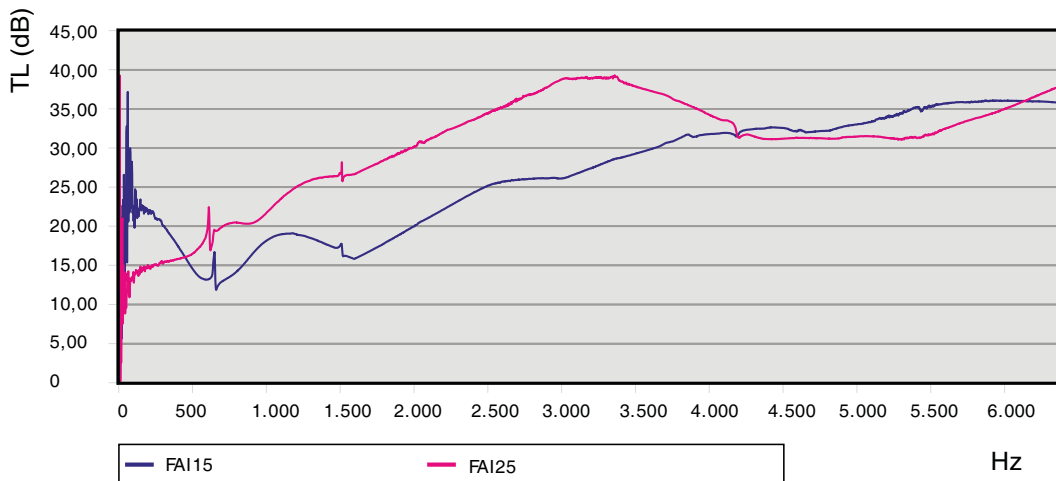

Absorption coefficient

FAI

