


# Akustikabsorber

## FDM

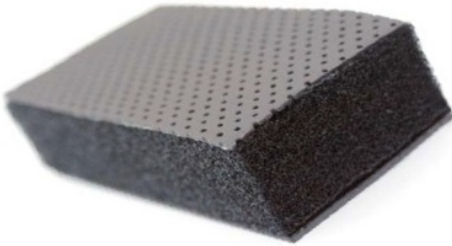

Beige colour perforated PVC facing, M-1 class fireresistant absorbing polyurethane foam and 5 Kg/m<sup>2</sup> heavy viscoelastic mass.

Measurements according to UNE-EN ISO 140-3 standard (December 1995) Acoustic Isolation of Construction Materials in Laboratory Measurements. Corresponds completely with ISO 140-3(1995) standard. Cancels and substitutes UNE 74-040/3 (1984) standard. Calculations according to NBECA88.

Type	Code	SELF-ADHESIVE	Rw (dB)	Weight (kg.)
FDM-15 sheet	26281	-	15	7,335
FDM-15 A sheet	26283	x	15	7,335
FDM-25 sheet	26282	-	13	8,085
FDM-25 A sheet	26284	x	13	8,085

### TECHNICAL CHARACTERISTICS

#### — Composition

Beige colour perforated PVC facing, M-1 class fireresistant absorbing polyurethane foam and 5 Kg/m<sup>2</sup> heavy viscoelastic mass.

#### — Thicknesses

15mm 25mm

### FORMATS

#### — Sheets

1200x1000 mm  
15mm thick, 8 Sheets per box.  
25mm thick, 5 Sheets per box.

### APPLICATIONS

Lining interior of soundproof cabins and vehicles,

# Akustikabsorber

## FDM

### ACOUSTIC PROPERTIES

