

# Akustikabsorber

## PD30M



Beige perforated PVC facing, absorbing polyurethane foam and 5 Kg/m<sup>2</sup> heavy viscoelastic mass inserted within.

Measurements according to UNE-EN ISO 140-3 standard (December 1995)  
Acoustic Isolation of Construction Materials in Laboratory Measurements.  
Corresponds completely with ISO 140-3(1995) standard.  
Cancels and substitutes UNE 74-040/3 (1984) standard.  
Calculations according to NBECA88.

Type	Code	SELF-ADHESIVE	Rw (dB)	Weight (kg)
PD30M	26046	-	27	6,916

### TECHNICAL CHARACTERISTICS

#### — Composition

Beige perforated PVC facing, absorbing polyurethane foam and 5 Kg/m<sup>2</sup> heavy viscoelastic mass inserted within.

#### — Thicknesses

30mm

### FORMATS

#### — Sheets

1200x1000 mm  
30mm thick, 4 Sheets per box.

### APPLICATIONS


Lining interior of yacht engine rooms or sport crafts, good absorption and damping sheet that increases the mass and dampens vibrations.

# Akustikabsorber **PD30M**

## ACOUSTIC PROPERTIES

Transmission Loss (dB)

PD30M

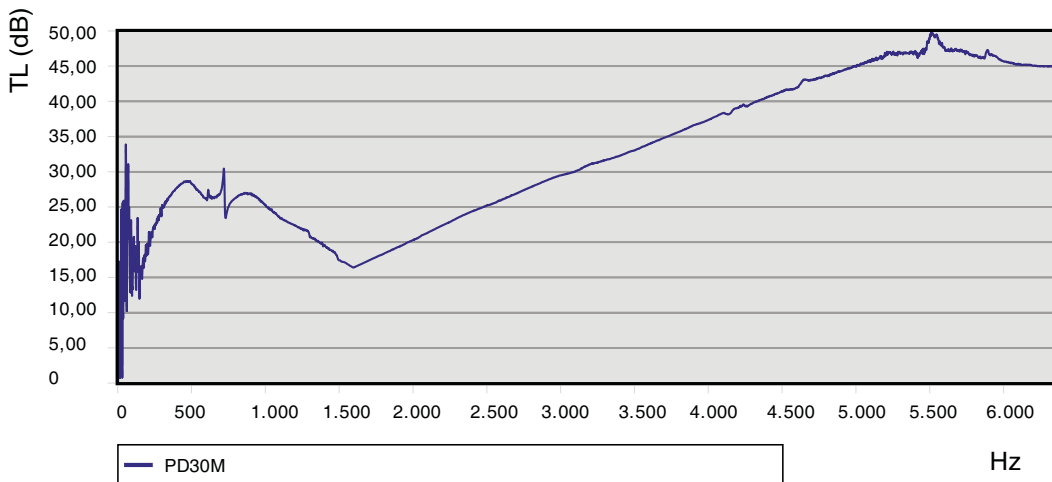

Absorption coefficient

PD30M

