


PT FIRE-RESISTANT

M-1 class fire-resistant melamine honeycomb foam.

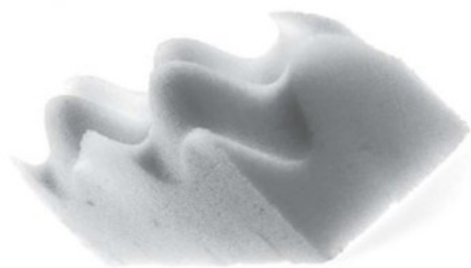

Measurements according to UNE-EN ISO 140-3 standard (December 1995)
Acoustic Isolation of Construction Materials in Laboratory Measurements.
Corresponds completely with ISO 140-3(1995) standard.
Cancels and substitutes UNE 74-040/3 (1984) standard.
Calculations according to NBCEA88.

Type	Code	SELF-ADHESIVE	Rw (dB)	Weight /m2 (kg)
PT-FIRE-RESISTANT B/30	26351	-	9	0,18
PT-FIRE-RESISTANT B/50	26352	-	10	0,25
PT-FIRE-RESISTANT B/30 A	26354		9	0,18
PT-FIRE-RESISTANT B/50 A	26353		10	0,3

TECHNICAL CHARACTERISTICS

— Composition

M-1 class fire-resistant melamine honeycomb foam.

— Thicknesses

30mm 50mm

FORMATS

— Sheets

1200x600 mm


APPLICATIONS

Thermal insulation, M-1 class fire-resistant behaviour, very good acoustic absorber and decorative.

ACOUSTIC PROPERTIES

Transmission Loss (dB)

PT FIRE-RESISTANT

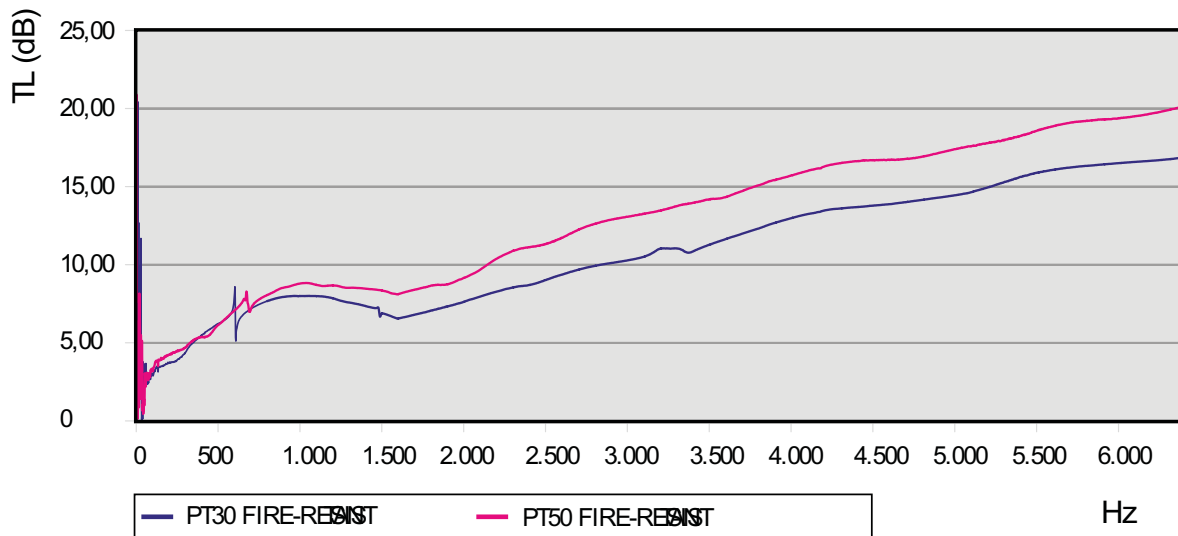

Absorption coefficient

PT FIRE-RESISTANT

