


Akustikabsorber

PT FIRE-RESISTANT

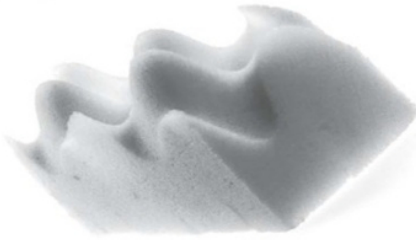

M-1 class fire-resistant melamine honeycomb foam.

Measurements according to UNE-EN ISO 140-3 standard (December 1995)
Acoustic Isolation of Construction Materials in Laboratory Measurements.
Corresponds completely with ISO 140-3(1995) standard.
Cancels and substitutes UNE 74-040/3 (1984) standard.
Calculations according to NBCEA88.

Type	Code	SELF-ADHESIVE	Rw (dB)	Weight (kg.)
PT-FIRE-RESISTANT B/30	26351	-	9	18
PT-FIRE-RESISTANT B/50	26352	-	10	18
PT-FIRE-RESISTANT B/30	26354	x	9	18
PT-FIRE-RESISTANT B/50	26353	x	10	18

TECHNICAL CHARACTERISTICS

— **Composition**

M-1 class fire-resistant melamine honeycomb foam.

— **Thicknesses**

30mm 50mm

FORMATS

— **Sheets**

12000x600 mm

APPLICATIONS

Thermal insulation, M-1 class fire-resistant behaviour, very good acoustic absorber and decorative.

Akustikabsorber

PT FIRE-RESISTANT

ACOUSTIC PROPERTIES

