

PYRAMIDAL FIRE-RESISTANT

M-1 class fire-resistant melamine honeycomb foam.



Measurements according to UNE-EN ISO 140-3 standard (December 1995)
Acoustic Isolation of Construction Materials in Laboratory Measurements.
Corresponds completely with ISO 140-3(1995) standard.
Cancels and substitutes UNE 74-040/3 (1984) standard.
Calculations according to NBCEA88.

Type	Code	SELF-ADHESIVE	Rw (dB)	Weight /m2 (kg)
PYRAMIDAL FIRE-RESISTANT 30 Sheet	26805	-	9	0,091
PYRAMIDAL FIRE-RESISTANT 30 A Sheet	26807		9	0,111
PYRAMIDAL FIRE-RESISTANT 50 A Sheet	26806		11	0,17
PYRAMIDAL FIRE-RESISTANT 50 Sheet	26808	-	11	0,17

TECHNICAL CHARACTERISTICS

— Composition

M-1 class fire-resistant melamine honeycomb foam.

— Thicknesses

30mm 50mm

FORMATS

— Sheets

1200x600 mm


APPLICATIONS

Thermal insulation, M-1 fire performance, very good sound absorption and decorative appearance.

ACOUSTIC PROPERTIES

Transmission Loss (dB)

PYRAMIDAL FIRE-RESISTANT

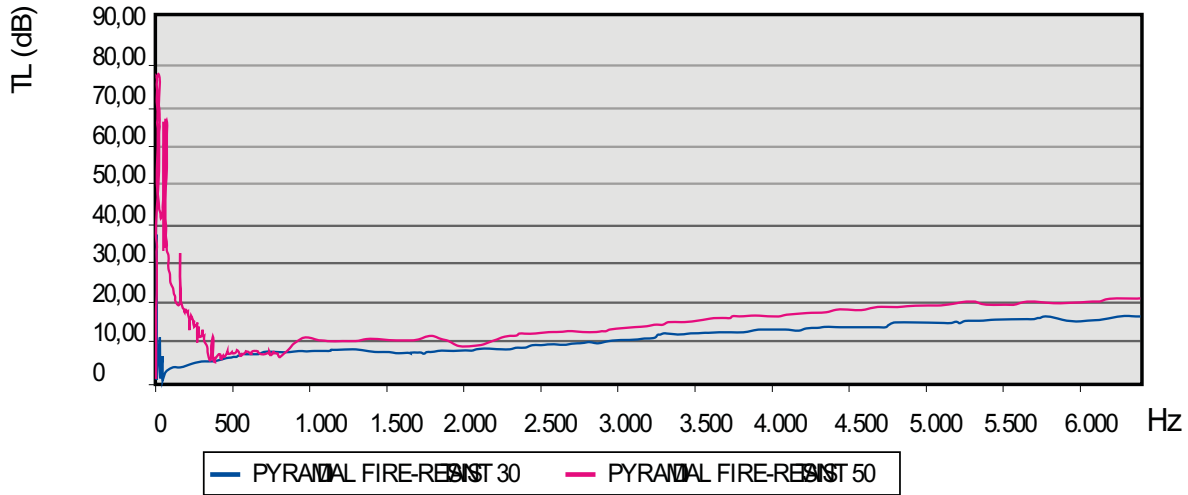

Absorption coefficient

PYRAMAL FIRE-RESISTANT

