


Akustikabsorber

AGLO D

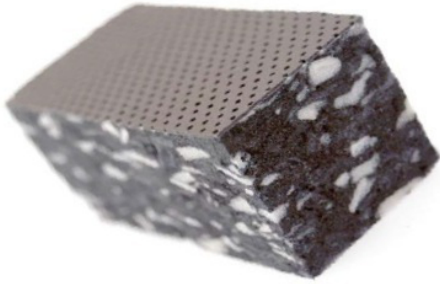

Beige perforated PVC facing and bound polyurethane foam with a density of 150 Kg/m³.

Measurements according to UNE-EN ISO 140-3 standard (December 1995)
Acoustic Isolation of Construction Materials in Laboratory Measurements.
Corresponds completely with ISO 140-3(1995) standard.
Cancels and substitutes UNE 74-040/3 (1984) standard.
Calculations according to NBCEA88.

Type	Code	SELF-ADHESIVE	Rw (dB)	Weight (kg)
AGLO D 150/20	28300	-	23	3
AGLO D A 150/20	28302	x	23	3
AGLO D 150/40	28301	-	23	6
AGLO D A 150/40	28303	x	23	6

TECHNICAL CHARACTERISTICS

— Composition

Beige perforated PVC facing and bound polyurethane foam with a density of 150 Kg/m³.

— Thicknesses

20mm 40mm

FORMATS

— Sheets

2000x1000 mm

— Rolls

Consult for roll manufacturing.

APPLICATIONS

Lining interior of soundproof cabins and vehicles, good absorption.

Akustikabsorber

AGLO D

ACOUSTIC PROPERTIES

