

AGLO PAI



Aluminium facing with fiberglass support and bound polyurethane foam with a density of 150 Kg/m³.

Measurements according to UNE-EN ISO 140-3 standard (December 1995)
Acoustic Isolation of Construction Materials in Laboratory Measurements.
Corresponds completely with ISO 140-3(1995) standard.
Cancels and substitutes UNE 74-040/3 (1984) standard.
Calculations according to NBECA88.

Type	Code	Self-adhesive	Rw (dB)	Weight/m ² (kg)
AGLO PAI 150/20	28101	-	26	3
AGLO PAI + AUTO 150/20	28308		26	3
AGLO PAI 150/40	28102	-	24	8
AGLO PAI + AUTO 150/40	28309		24	6

TECHNICAL CHARACTERISTICS

— Composition

Aluminium facing with fiberglass support and bound polyurethane foam with a density of 150 Kg/m³.

— Thicknesses

20mm 40mm

FORMATS

— Sheets

2000x1000 mm


APPLICATIONS

Thermal insulation, M-1 class fire-resistant, good resistance to hydrocarbon damage and not very good acoustic absorber but good isolator.

ACOUSTIC PROPERTIES

Transmission Loss (dB)

AGLOPAI

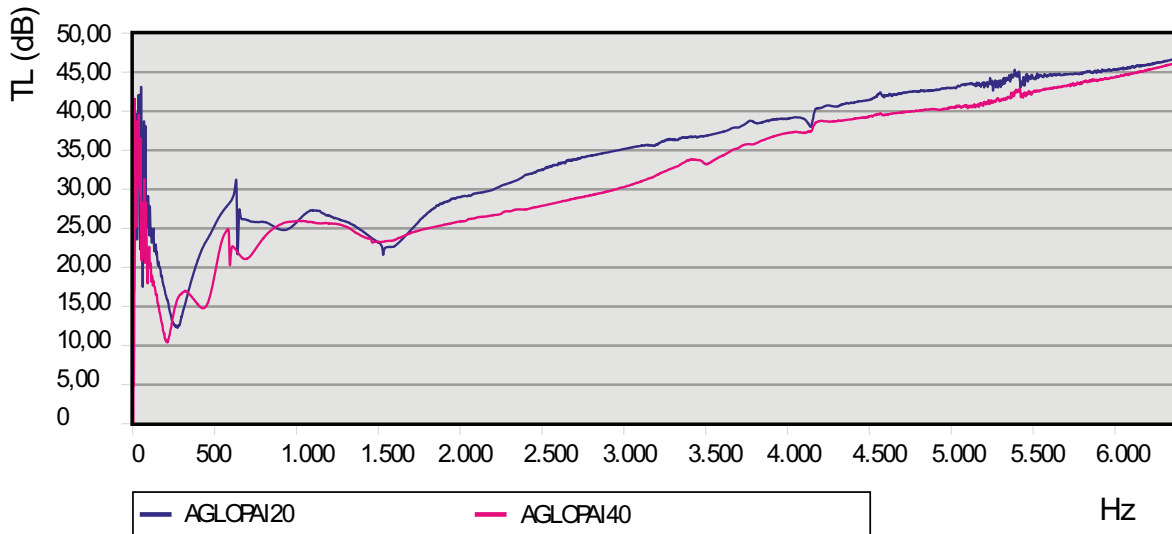

Absorption coefficient

AGLOPAI

