



Aluminium facing with fibreglass support and M-1 class fire-resistant absorbing polyurethane foam.

Measurements according to UNE-EN ISO 140-3 standard (December 1995) Acoustic Isolation of Construction Materials in Laboratory Measurements. Corresponds completely with ISO 140-3(1995) standard. Cancels and substitutes UNE 74-040/3 (1984) standard. Calculations according to NBECA88.

Typ	Art.Nr.	Selbstklebend	Rw (dB)	Gewicht/m <sup>2</sup> (kg)
FAI-15 Platte	26251	-	19	1,335
FAI-15 A Platte	26253		19	1,335
FAI-25 Platte	26252	-	23	2,085
FAI-25 A Platte	26254		23	2,085

## TECHNISCHE MERKMALE

### — Composition

Aluminium facing with fibreglass support and M-1 class fire-resistant absorbing polyurethane foam.

### — Thicknesses

15mm 25mm

## FORMAT

### — Platten

1200x1000 mm  
 15mm stark, 8 Platten pro Karton.  
 25mm stark, 5 Platten pro Karton.


## ANWENDUNGEN

Aislante térmico, comportamiento M-1 ignífugo, buena resistencia al empape de hidrocarburos y no muy buen absorbente acústico pero sí buen aislante.

## AKUSTISCHE EIGENSCHAFTEN

Transmission Loss (dB)

FAI

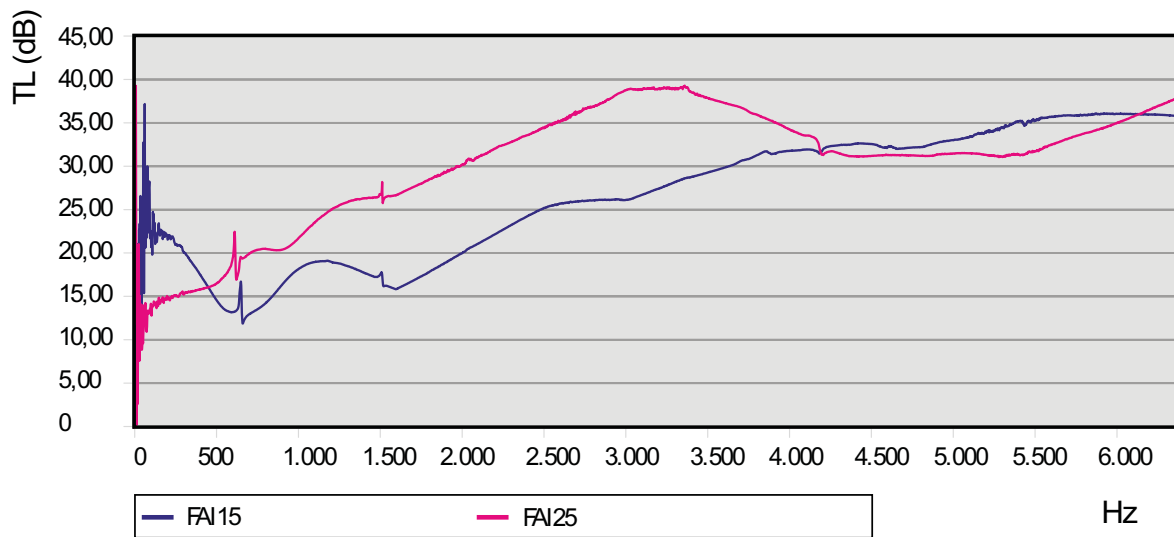

Absorption coefficient

FAI

