



Fiberglass facing and M-1 class fireresistant absorbing polyurethane foam.

Measurements according to UNE-EN ISO 140-3 standard (December 1995) Acoustic Isolation of Construction Materials in Laboratory Measurements. Corresponds completely with ISO 140-3(1995) standard. Cancels and substitutes UNE 74-040/3 (1984) standard. Calculations according to NBECA88.

| Typ | Art.Nr. | Selbstklebend | Rw (dB) | Gewicht/m ² (kg) |
|----------------|---------|---------------|---------|-----------------------------|
| FI-15 Platte | 26206 | - | 22 | 1,335 |
| FI-15 A Platte | 26201 | | 22 | 1,335 |
| FI-25 Platte | 26207 | - | 23 | 2,085 |
| FI-25 A Platte | 26205 | | 23 | 2,085 |

TECHNISCHE MERKMALE

— Composition

Fiberglass facing and M-1 class fireresistant absorbing polyurethane foam.

— Thicknesses

15mm 25mm

FORMAT

— Platten

1200x1000 mm
15mm stark, 8 Platten pro Karton.
25mm stark, 5 Platten pro Karton.


ANWENDUNGEN

Aislante térmico, comportamiento M-1 ignífugo, buena resistencia al empape de hidrocarburos y no muy buen absorbente acústico pero sí buen aislante.

AKUSTISCHE EIGENSCHAFTEN

Transmission Loss (dB)

FAI

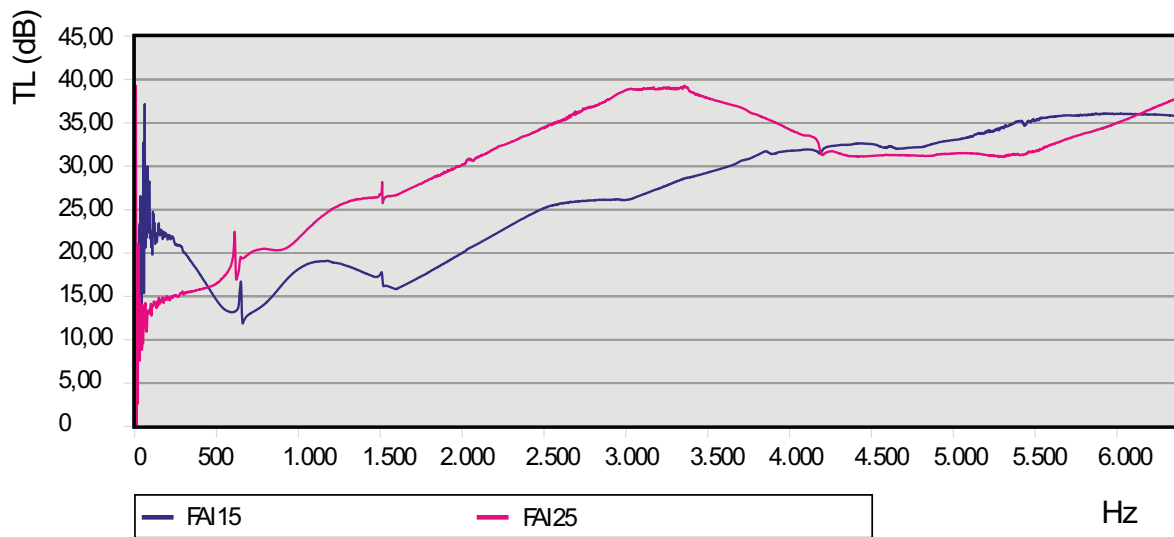

Absorption coefficient

FAI

