

Akustikabsorber

FARM



Black unwoven film, M-1 class fireresistant absorbing polyurethane foam and 5 Kg/m² heavy viscoelastic mass.

Measurements according to UNE-EN ISO 140-3 standard (December 1995) Acoustic Isolation of Construction Materials in Laboratory Measurements. Corresponds completely with ISO 140-3(1995) standard. Cancels and substitutes UNE 74-040/3 (1984) standard. Calculations according to NBCEA88.

Typ	Art.Nr.	Selbstklebend	Rw (dB)	Gewicht (kg.)
FARM-15 Platte	26261	-	12	7,335
FARM-15 A Platte	26263	x	12	7,335
FARM-25 Platte	26262	-	13	8,085
FARM-25 A Platte	26264	x	13	8,085

TECHNISCHE MERKMALE

— Composition

Black unwoven film, M-1 class fireresistant absorbing polyurethane foam and 5 Kg/m² heavy viscoelastic mass.

— Thicknesses

15mm 25mm

FORMAT

— Platten

1200x1000 mm
15mm stark, 8 Platten pro Karton.
25mm stark, 5 Platten pro Karton.

ANWENDUNGEN

Revestimiento interior de cabinas insonorizadas o de vehículos, buena absorción, absorbente con comportamiento ignífugo M-1 y lámina amortiguante que aumenta la masa y amortigua las vibraciones.


Akustikabsorber

FARM

AKUSTISCHE EIGENSCHAFTEN

Transmission Loss (dB)

FARM

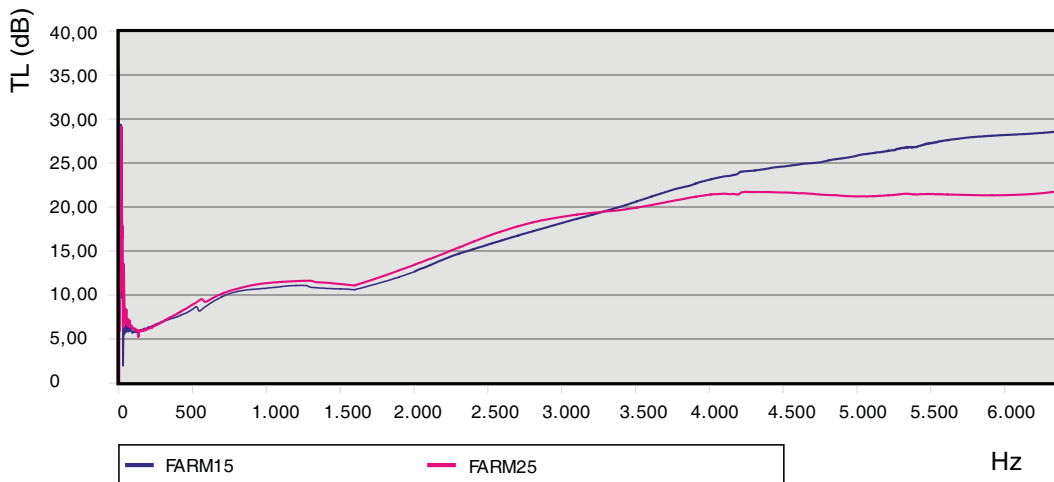

Absorption coefficient

FARM

