

Akustikabsorber

PAIM



Aluminium facing with fiberglass support, absorbing polyurethane foam and 5 Kg/m² heavy viscoelastic mass.

Measurements according to UNE-EN ISO 140-3 standard (December 1995)
Acoustic Isolation of Construction Materials in Laboratory Measurements.
Corresponds completely with ISO 140-3(1995) standard.
Cancels and substitutes UNE 74-040/3 (1984) standard.
Calculations according to NBCEA88.

Typ	Art.Nr.	Selbstklebend	Rw (dB)	Gewicht (kg.)
PAIM-15 Platte	26122	-	20	6,853
PAIM-15 A Platte	26116	x	20	6,853
PAIM-25 Platte	26123	-	21	7,155
PAIM-25 A Platte	26117	x	21	7,155
PAIM-40 Platte	26124	-	22	7,608
PAIM-40 A Platte	26118	x	22	7,608

TECHNISCHE MERKMALE

— Composition

Aluminium facing with fiberglass support, absorbing polyurethane foam and 5 Kg/m² heavy viscoelastic mass.

— Thicknesses

15mm 25mm 40mm

FORMAT

— Platten

1200x1000 mm
15mm stark, 8 Platten pro Karton.
25mm stark, 5 Platten pro Karton.
40mm stark, 3 Platten pro Karton.

ANWENDUNGEN

Aislante térmico, comportamiento M-1 ignífugo, buena resistencia al empape de hidrocarburos y no muy buen absorbente acústico pero sí buen aislante y lámina amortiguante que aumenta la masa y amortigua las vibraciones.


Akustikabsorber

PAIM

AKUSTISCHE EIGENSCHAFTEN

Transmission Loss (dB)

PAIM

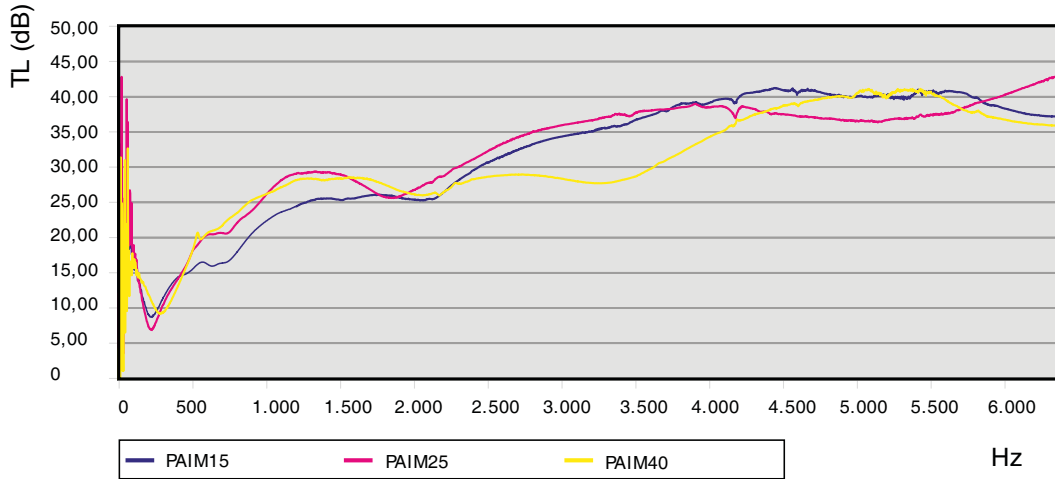

Absorption coefficient

PAIM

