


Akustikabsorber

PDM

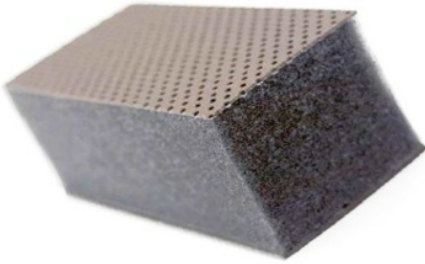

Beige colour perforated PVC facing, absorbing polyurethane foam and 5 Kg/m² heavy viscoelastic mass.

Measurements according to UNE-EN ISO 140-3 standard (December 1995)
Acoustic Isolation of Construction Materials in Laboratory Measurements.
Corresponds completely with ISO 140-3(1995) standard.
Cancels and substitutes UNE 74-040/3 (1984) standard.
Calculations according to NBCEA88.

Typ	Art.Nr.	Selbstklebend	Rw (dB)	Gewicht (kg)
PDM-15 Platte	26108	-	12	7,113
PDM-15 A Platte	26102	□	12	7,113
PDM-25 Platte	26110	-	12	7,415
PDM-25 A Platte	26104	□	12	7,415
PDM-40 Platte	26112	-	20	7,868
PDM-40 A Platte	26106	□	20	7,868

TECHNISCHE MERKMALE

— Composition

Beige colour perforated PVC facing, absorbing polyurethane foam and 5 Kg/m² heavy viscoelastic mass.

— Thicknesses

15mm 25mm 40mm

FORMAT

— Platten

1200x1000 mm
15mm stark, 8 Platten pro Karton.
25mm stark, 5 Platten pro Karton.
40mm stark, 3 Platten pro Karton.

ANWENDUNGEN

Revestimiento interior de cabinas insonorizadas o de vehículos, buena absorción y lámina amortizante que aumenta la masa y amortigua las vibraciones.


Akustikabsorber

PDM

AKUSTISCHE EIGENSCHAFTEN

Transmission Loss (dB)

PDM

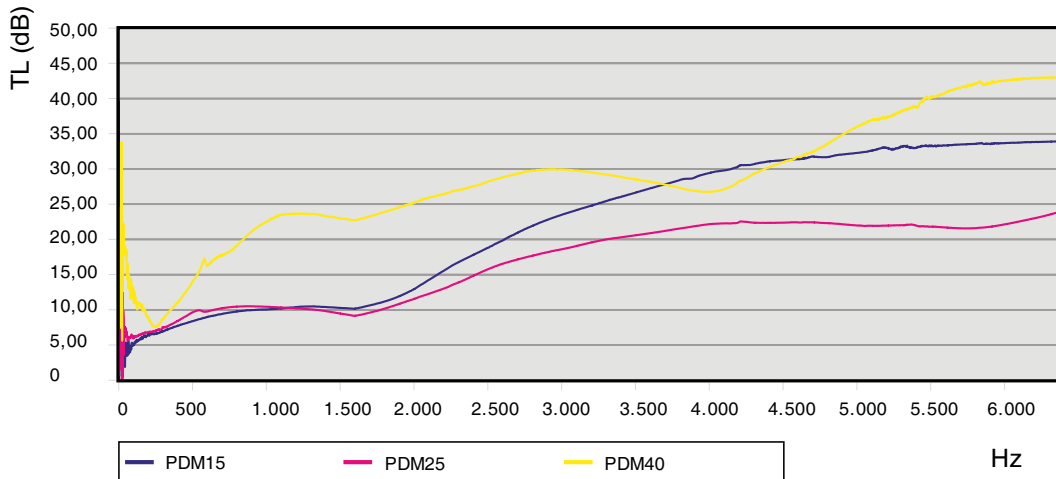

Absorption coefficient

PDM

