

Akustikabsorber

FAI30M



Aluminium facing with fiberglass support, M-1 class fire-resistant absorbing polyurethane foam and 5 Kg/m² heavy viscoelastic mass inserted within.

Measurements according to UNE-EN ISO 140-3 standard (December 1995) Acoustic Isolation of Construction Materials in Laboratory Measurements. Corresponds completely with ISO 140-3(1995) standard. Cancels and substitutes UNE 74-040/3 (1984) standard. Calculations according to NBECA88.

Typ	Art.Nr.	Selbstklebend	Rw (dB)	Gewicht (kg.)
FAI30M	26275	-	29	8,085

TECHNISCHE MERKMALE

— Composition

Aluminium facing with fiberglass support, M-1 class fire-resistant absorbing polyurethane foam and 5 Kg/m² heavy viscoelastic mass inserted within.

— Thicknesses

30mm

FORMAT

— Platten

1200x1000 mm
30mm stark, 4 Platten pro Karton.

ANWENDUNGEN


Aislante térmico, comportamiento M-1 ignífugo, buena resistencia al empape de hidrocarburos y no muy buen absorbente acústico pero sí buen aislante y lámina amortiguante que aumenta la masa y amortigua las vibraciones, en aplicaciones náuticas.

Akustikabsorber **FAI30M**

AKUSTISCHE EIGENSCHAFTEN

Transmission Loss (dB)

FAI30M

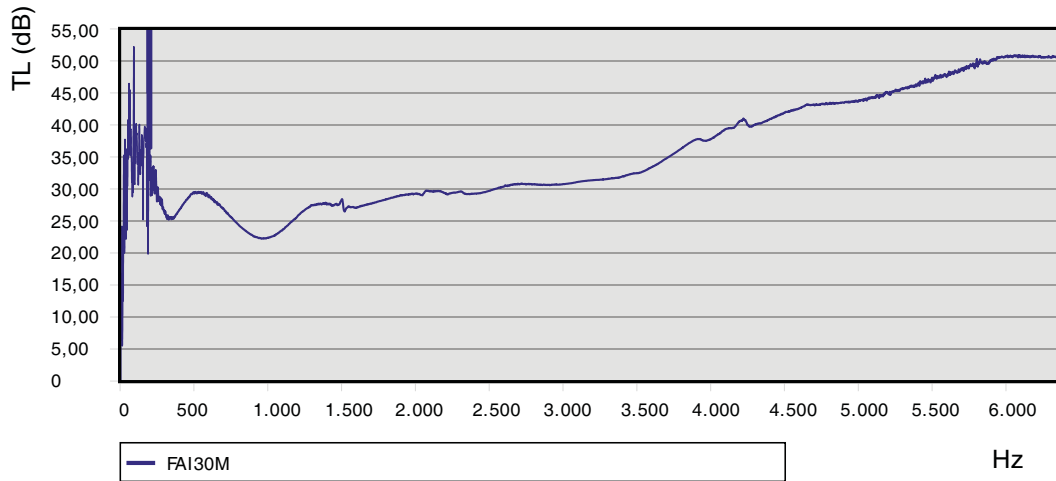

Absorption coefficient

FAI30M

