


PT FEUERFEST WEISS

M-1 class fire-resistant melamine honeycomb foam.

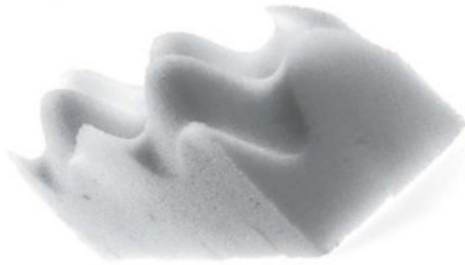

Measurements according to UNE-EN ISO 140-3 standard (December 1995)
Acoustic Isolation of Construction Materials in Laboratory Measurements.
Corresponds completely with ISO 140-3(1995) standard.
Cancels and substitutes UNE 74-040/3 (1984) standard.
Calculations according to NBCEA88.

Typ	Art.Nr.	Selbstklebend	Rw (dB)	Gewicht/m ² (kg)
PT-IGNIFUGO B/30	26351	-	9	0,18
PT-IGNIFUGO B/50	26352	-	10	0,25
PT-IGNIFUGO B/30 A	26354		9	0,18
PT-IGNIFUGO B/50 A	26353		10	0,3

TECHNISCHE MERKMALE

— Composition

M-1 class fire-resistant melamine honeycomb foam.

— Thicknesses

30mm 50mm

FORMAT

— Platten


1200x600 mm

ANWENDUNGEN

Aislante térmico, comportamiento M-1 ignífugo, muy buen absorbente acústico y aspecto decorativo.

AKUSTISCHE EIGENSCHAFTEN

Transmission Loss (dB) PT FIRE-RESIST

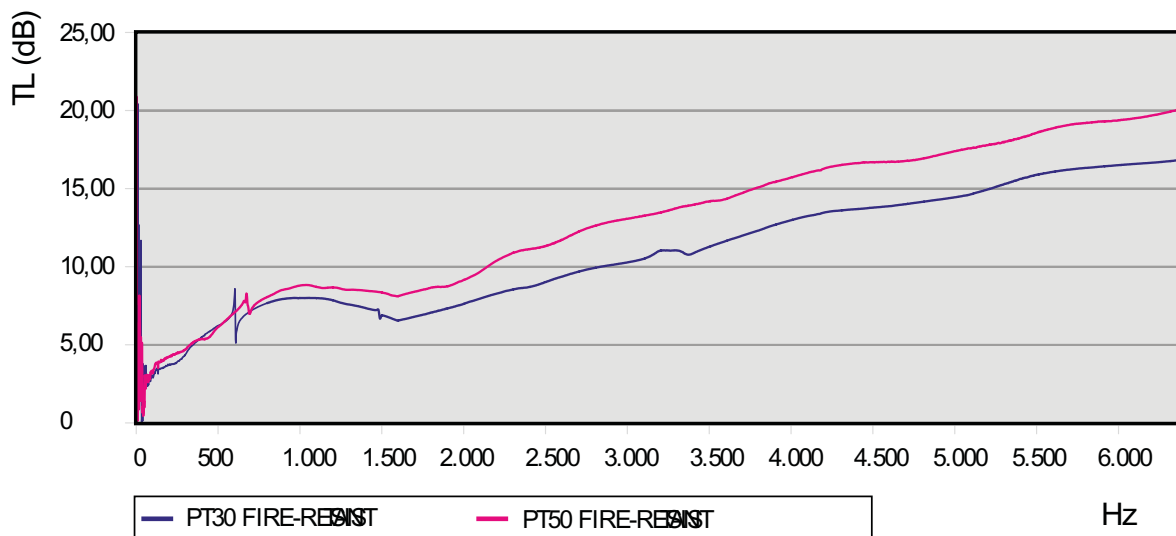

Absorption coefficient PT FIRE-RESIST

