

PAVIABSORBER



Antiskid Mat and absorbent polyethylene closed cell foam.

Measurements according to UNE-EN ISO 140-3 standard (December 1995)
Acoustic Isolation of Construction Materials in Laboratory Measurements.
Corresponds completely with ISO 140-3(1995) standard.
Cancels and substitutes UNE 74-040/3 (1984) standard.
Calculations according to NBCEA88.

Typ	Art.Nr.	Selbstklebend	Rw (dB)	Gewicht (kg)
PAVIABSORBER (PAV.CIR.+ MP + POLYETHYLEN)	26701	-	22	13
PAVIABSORBER A (PAV.CIR.+ MP + POLYETHYLEN)	26703	□	22	13

TECHNISCHE MERKMALE

— Composition

Antiskid Mat, absorbent polyethylene foam and visco elastic heavy mass of 5kg / m² interleaved.

— Thicknesses

15mm

FORMAT

— Platten

1200x1000 mm


ANWENDUNGEN

Aislamiento de ruido aéreo, alfombras para cabinas de tractores, maquinaria de construcción...

AKUSTISCHE EIGENSCHAFTEN

Transmission Loss (dB)

PAVIABSORBER

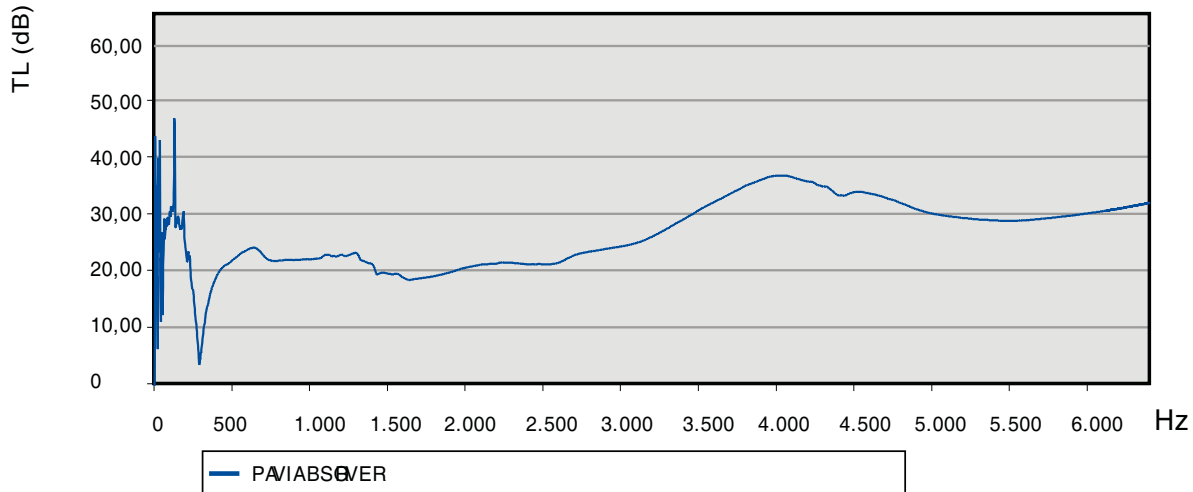

Absorption coefficient

PAVIABSORBER

