


Akustikabsorber

AGLO D

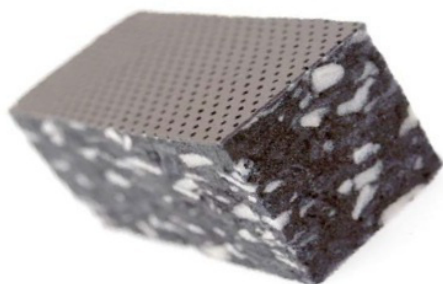

Beige perforated PVC facing and bound polyurethane foam with a density of 150 Kg/m³.

Measurements according to UNE-EN ISO 140-3 standard (December 1995) Acoustic Isolation of Construction Materials in Laboratory Measurements. Corresponds completely with ISO 140-3(1995) standard. Cancels and substitutes UNE 74-040/3 (1984) standard. Calculations according to NBCEA88.

Typ	Art.Nr.	Selbstklebend	Rw (dB)	Gewicht (kg.)
AGLO D 150/20	28300	-	23	3
AGLO D A 150/20	28302	x	23	3
AGLO D 150/40	28301	-	23	6
AGLO D A 150/40	28303	x	23	6

TECHNISCHE MERKMALE

— Composition

Beige perforated PVC facing and bound polyurethane foam with a density of 150 Kg/m³.

— Thicknesses

20mm 40mm

FORMAT

— Platten

2000x1000 mm

— Rolle

Consult for roll manufacturing.

ANWENDUNGEN

Revestimiento interior de cabinas insonorizadas o de vehículos, buena absorción.

Akustikabsorber

AGLO D

AKUSTISCHE EIGENSCHAFTEN

