

Akustikabsorber

FARM



Black unwoven film, M-1 class fireresistant absorbing polyurethane foam and 5 Kg/m² heavy viscoelastic mass.

Measurements according to UNE-EN ISO 140-3 standard (December 1995) Acoustic Isolation of Construction Materials in Laboratory Measurements. Corresponds completely with ISO 140-3(1995) standard. Cancels and substitutes UNE 74-040/3 (1984) standard. Calculations according to NBCEA88.

Tipo	Codice	autoadesive	Rw (dB)	Peso (kg.)
FARM-15 plancha	26261	-	12	7,335
FARM-15 A plancha	26263	x	12	7,335
FARM-25 plancha	26262	-	13	8,085
FARM-25 A plancha	26264	x	13	8,085

CARATTERISTICHE TECNICHE

— Composition

Black unwoven film, M-1 class fireresistant absorbing polyurethane foam and 5 Kg/m² heavy viscoelastic mass.

— Thicknesses

15mm 25mm

FORMATS

— Sheets

1200x1000 mm
15mm thick, 8 Sheets per box.
25mm thick, 5 Sheets per box.

APPLICAZIONI

Revestimiento interior de cabinas insonorizadas o de vehículos, buena absorción, absorbente con comportamiento ignífugo M-1 y lámina amortiguante que aumenta la masa y amortigua las vibraciones.


Akustikabsorber

FARM

PROPRIETÀ ACUSTICHE

Transmission Loss (dB)

FARM

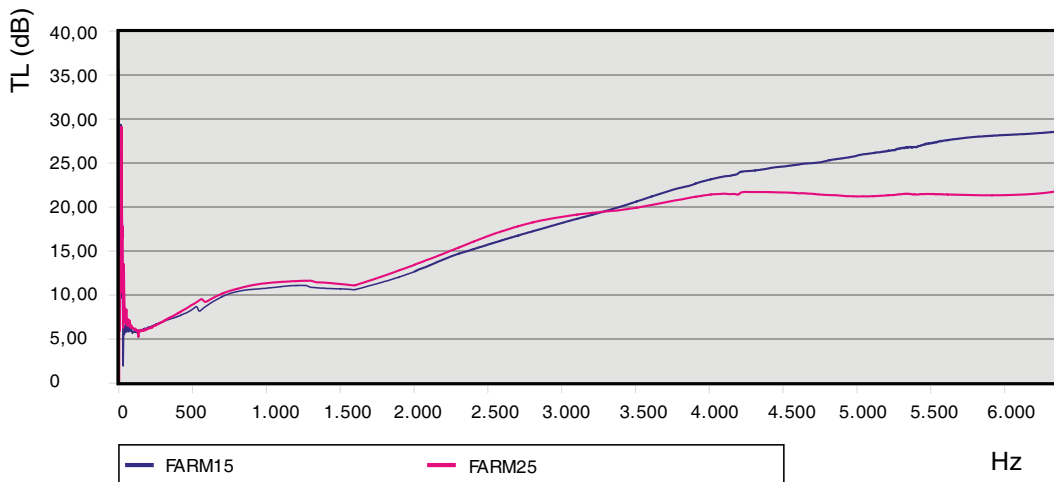

Absorption coefficient

FARM

