


Akustikabsorber

FIM

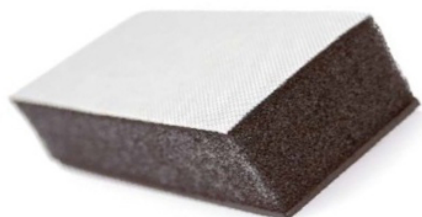

Fiberglass facing, M- 1 class fire-resistant absorbing polyurethane foam and 5 Kg/m² heavy viscoelastic mass.

Measurements according to UNE-EN ISO 140-3 standard (December 1995) Acoustic Isolation of Construction Materials in Laboratory Measurements. Corresponds completely with ISO 140-3(1995) standard. Cancels and substitutes UNE 74-040/3 (1984) standard. Calculations according to NBCEA88.

Tipo	Codice	autoadesive	Rw (dB)	Peso (kg.)
FIM-15 plancha	26221	-	24	7,335
FIM-15 A plancha	26211	x	24	7,335
FIM-25 plancha	26225	-	24	8,085
FIM-25 A plancha	26215	x	24	8,085

CARATTERISTICHE TECNICHE

— Composition

Fiberglass facing, M- 1 class fire-resistant absorbing polyurethane foam and 5 Kg/m² heavy viscoelastic mass.

— Thicknesses

15mm 25mm

FORMATS

— Sheets

1200x1000 mm
15mm thick, 8 Sheets per box.
25mm thick, 5 Sheets per box.

APPLICAZIONI

Aislante térmico, comportamiento M-1 ignífugo, buena resistencia al empape de hidrocarburos y no muy buen absorbente acústico pero sí buen aislante absorbente con comportamiento ignífugo M-1 y lámina amortiguante que aumenta la masa y amortigua las vibraciones.

Akustikabsorber

FIM

PROPRIETÀ ACUSTICHE

