


Akustikabsorber

PT FIRE-RESISTANT

M-1 class fire-resistant melamine honeycomb foam.

Measurements according to UNE-EN ISO 140-3 standard (December 1995)
Acoustic Isolation of Construction Materials in Laboratory Measurements.
Corresponds completely with ISO 140-3(1995) standard.
Cancels and substitutes UNE 74-040/3 (1984) standard.
Calculations according to NBCEA88.

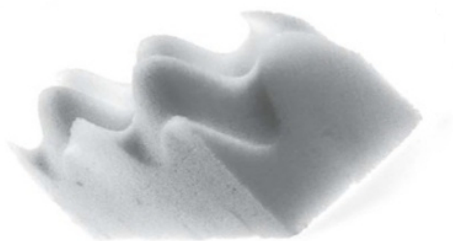

Tipo	Codice	autoadesive	Rw (dB)	Peso (kg.)
PT-IGNIFUGO B/30	26351	-	9	18
PT-IGNIFUGO B/50	26352	-	10	18
PT-IGNIFUGO B/30	26354	x	9	18
PT-IGNIFUGO B/50	26353	x	10	18

CARATTERISTICHE TECNICHE

— Composition

M-1 class fire-resistant melamine honeycomb foam.

— Thicknesses

30mm 50mm

FORMATS

— Sheets

1200x600 mm

APPLICAZIONI

Aislante térmico, comportamiento M-1 ignífugo, muy buen absorbente acústico y aspecto decorativo.

Akustikabsorber

PT FIRE-RESISTANT

PROPRIETÀ ACUSTICHE

