

# PYRAMIDAL FIRE-RESISTANT

M-1 class fire-resistant melamine honeycomb foam.



Measurements according to UNE-EN ISO 140-3 standard (December 1995)  
Acoustic Isolation of Construction Materials in Laboratory Measurements.  
Corresponds completely with ISO 140-3(1995) standard.  
Cancels and substitutes UNE 74-040/3 (1984) standard.  
Calculations according to NBCEA88.

Tipo	Codice	autoadesive	Rw (dB)	PESO/m2 (kg)
PIRAMIDAL IGNÍFUGO 30 plancha	26805	-	9	0,091
PIRAMIDAL IGNÍFUGO 30 A plancha	26807		9	0,111
PIRAMIDAL IGNÍFUGO 50 A plancha	26806		11	0,17
PIRAMIDAL IGNÍFUGO 50 plancha	26808	-	11	0,17

## CARATTERISTICHE TECNICHE

### — Composition

M-1 class fire-resistant melamine honeycomb foam.

### — Thicknesses

30mm 50mm

## FORMATS

### — Sheets

1200x600 mm


## APPLICAZIONI

Aislante térmico, comportamiento M-1 ignífugo, muy buen absorbente acústico y aspecto decorativo

PROPRIETÀ ACUSTICHE

Transmission Loss (dB)

PYRAMDAL FIRE-RESISTANT

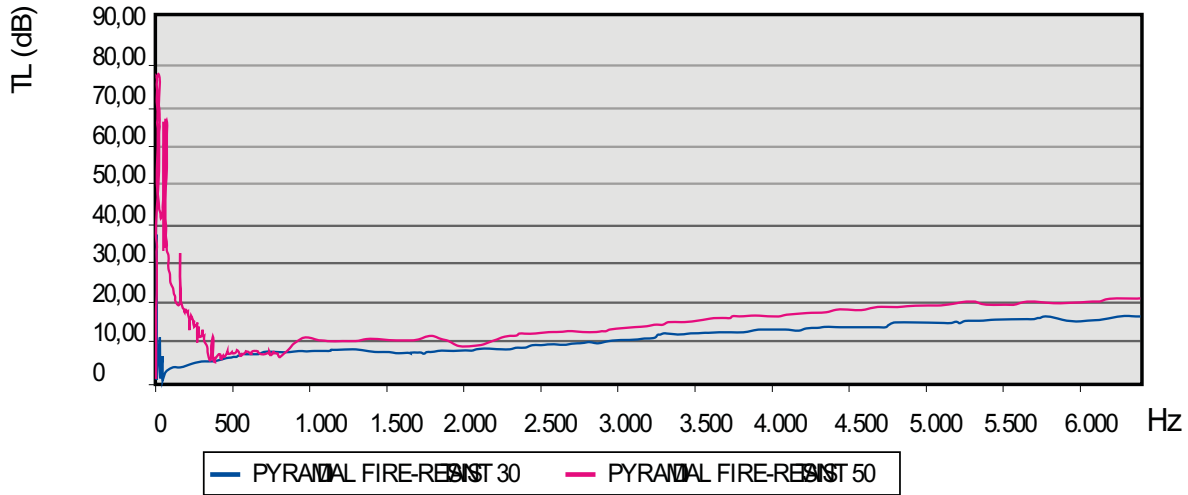

Absorption coefficient

PYRAMDAL FIRE-RESISTANT

