



Rivestimento in alluminio su supporto in fibra di vetro, con assorbente in fibra M-1 F-1.

Measurements according to UNE-EN ISO 140-3 standard (December 1995)
 Acoustic Isolation of Construction Materials in Laboratory Measurements.
 Corresponds completely with ISO 140-3(1995) standard.
 Cancels and substitutes UNE 74-040/3 (1984) standard.
 Calculations according to NBECA88.

Tipo	Codice	autoadesive	Rw (dB)	Peso (kg)
MARINE	28411	-	33	7,2

CARATTERISTICHE TECNICHE

- Spessore: 50mm
- Formato: fogli 1000 x 610 mm


FORMATS

APPLICAZIONI

Per isolamento termico; comportamento ritardante di fiamma M-1, comportamento del fumo molto buono, non molto assorbente, ma ottimo isolante.

PROPRIETÀ ACUSTICHE

Transmission Loss (dB)

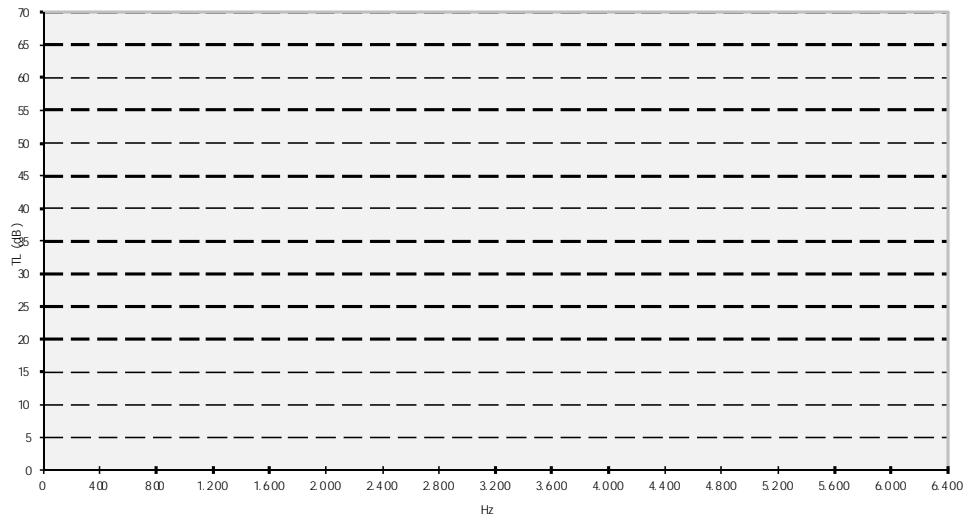

Absorption Coefficient

