

PD CREMA



Perforated white coloured PVC facing and absorbing polyurethane foam.

Measurements according to UNE-EN ISO 140-3 standard (December 1995) Acoustic Isolation of Construction Materials in Laboratory Measurements. Corresponds completely with ISO 140-3(1995) standard. Cancels and substitutes UNE 74-040/3 (1984) standard. Calculations according to NBECA88.

Tipo	Codice	autoadesive	Rw (dB)	Peso (kg)
PD-15 blanco plancha	26075	-	10	1,113
PD-15 A blanco plancha	26078	✓	10	1,113
PD-15 rollo blanco	26081	-	10	1,113
PD-15 A rollo blanco	26084	✓	10	1,113
PD-25 blanco plancha	26076	-	8	1,415
PD-25 A blanco plancha	26079	✓	8	1,415
PD-25 rollo blanco	26082	-	8	1,415
PD-25 A rollo blanco	26085	✓	8	1,415
PD-40 blanco plancha	26077	-	18	1,868
PD-40 A blanco plancha	26080	✓	18	1,868
PD-40 rollo blanco	26083	-	18	1,868
PD-40A rollo blanco	26086	✓	18	1,868

CARATTERISTICHE TECNICHE

- **Composition**
Perforated white coloured PVC facing and absorbing polyurethane foam.
- **Thicknesses**
15mm 25mm 40mm

FORMATS

- **Sheets**
1200x1000 mm
15mm thick, 8 Sheets per box.
25mm thick, 5 Sheets per box.
40mm thick, 3 Sheets per box.
- **Rolls**
15mm thick, 1500mm wide x approx. 25m long
25mm thick, 1500mm wide x approx. 25m long
40mm thick, 1500mm wide x approx. 20m long


APPLICAZIONI

Revestimiento interior de cabinas insonorizadas o de vehículos, buena absorción.

PROPRIETÀ ACUSTICHE

Transmission Loss (dB)

PDWHITE

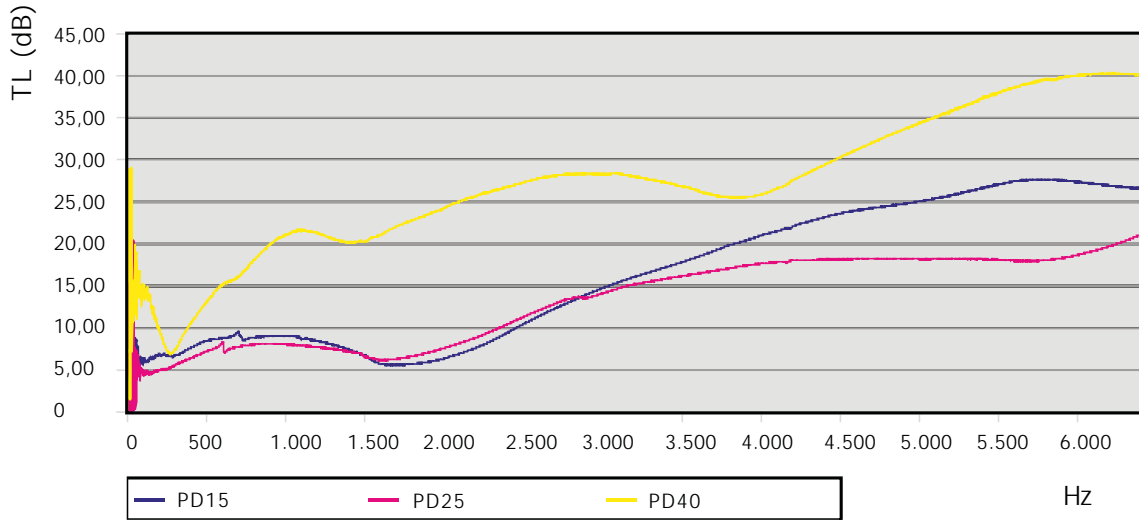

Absorption coefficient

PDWHITE

