


# AKUSTIK PIPE

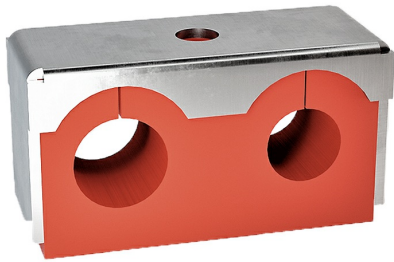

AMC-MECANOCAUCHO® Akustik Pipe consist in a double-hole Sylomer part enclosed in a steel housing.

The assembly of this mounting is very simple due to the easily removable Sylomer part and its single fastening hole. The uncovered distance by the housing determines the preload of the Akustik Pipe, allowing the bolt to be tightened until the housing is firmly in contact with the base.

AMC-MECANOCAUCHO® Akustik Pipes are specially suitable for applications where rigid or flexible pipes must be isolated, both for static and dynamic applications.

## TECHNICAL CHARACTERISTICS

### Advantages


- Compact design
- Fail-safe feature
- Multidirectional mount
- Excellent noise isolation
- Corrosion resistant
- Maintenance-free
- No aging

## APPLICATIONS

- Construction machinery
- Mining equipment
- Buses
- HVAC equipment
- Hydraulic equipment




DRAWINGS

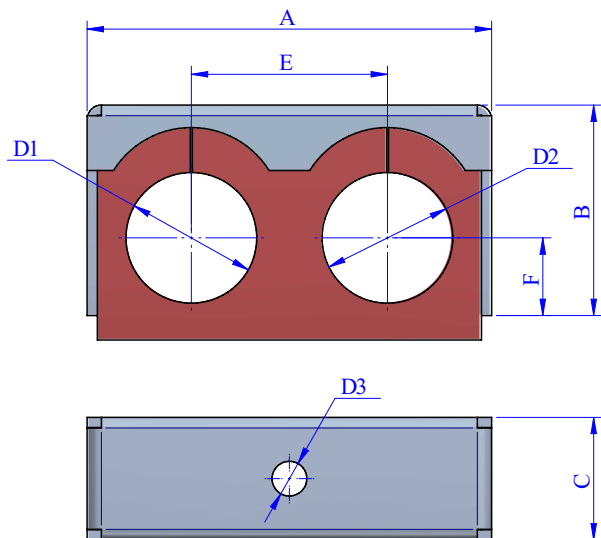

DIMENSIONS

Type	A (mm)	B (mm)	C (mm)	E (mm)	F (mm)	D1 (Min.)	D2 (Max.)	D3 (Max.)	Code	
Type A	70	34,5	29	36	14,5	15	18	8,5	23872	
	70	34,5	29	36	14,5	18	18	8,5	23873	
	82	42	29	43	16	21,2	24,3	8,5	23874	
	70	34,5	29	36	13	22	22	8,5	23871	
	99	51,5	30	48	48	21	28	28	8,5	23876
	99	51,5	30	48	48	21	32	32	8,5	23875



DRAWINGS

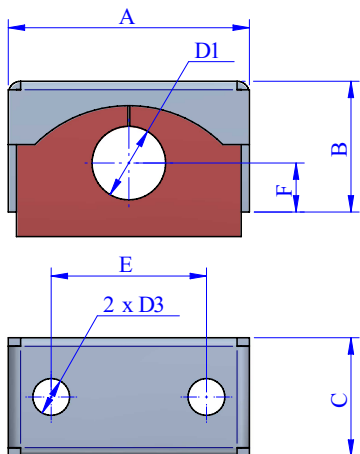

DIMENSIONS

Type	A (mm)	B (mm)	C (mm)	E (mm)	F (mm)	D1 (Min.)	D2 (Max.)	D3 (Max.)	Code
Type B	59	32	29	38	12	18	-	9	23877


DRAWINGS

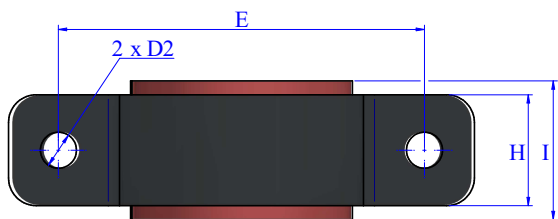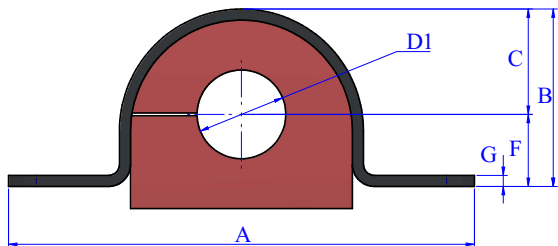

DIMENSIONS

Type	A (mm)	B (mm)	C (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	D1 (Min.)	D2 (Max.)	Code
Type Omega	84	32	19	66	13	2	20	25	10	6,5	23892
	84	32	19	66	13	2	20	25	14	6,5	23893
	94	42	24	76	18	2	20	25	20	6,5	23894
	94	42	24	76	18	2	20	25	26	6,5	23895
	69	24	13	51	11	2	20	25	5,5	6,5	23896
	84	32	19	66	13	2	20	25	16	6,5	23897
	104	50	28	28	86	22	2	20	25	33	6,5

Elastical properties  
**LOAD-DEFLECTION**

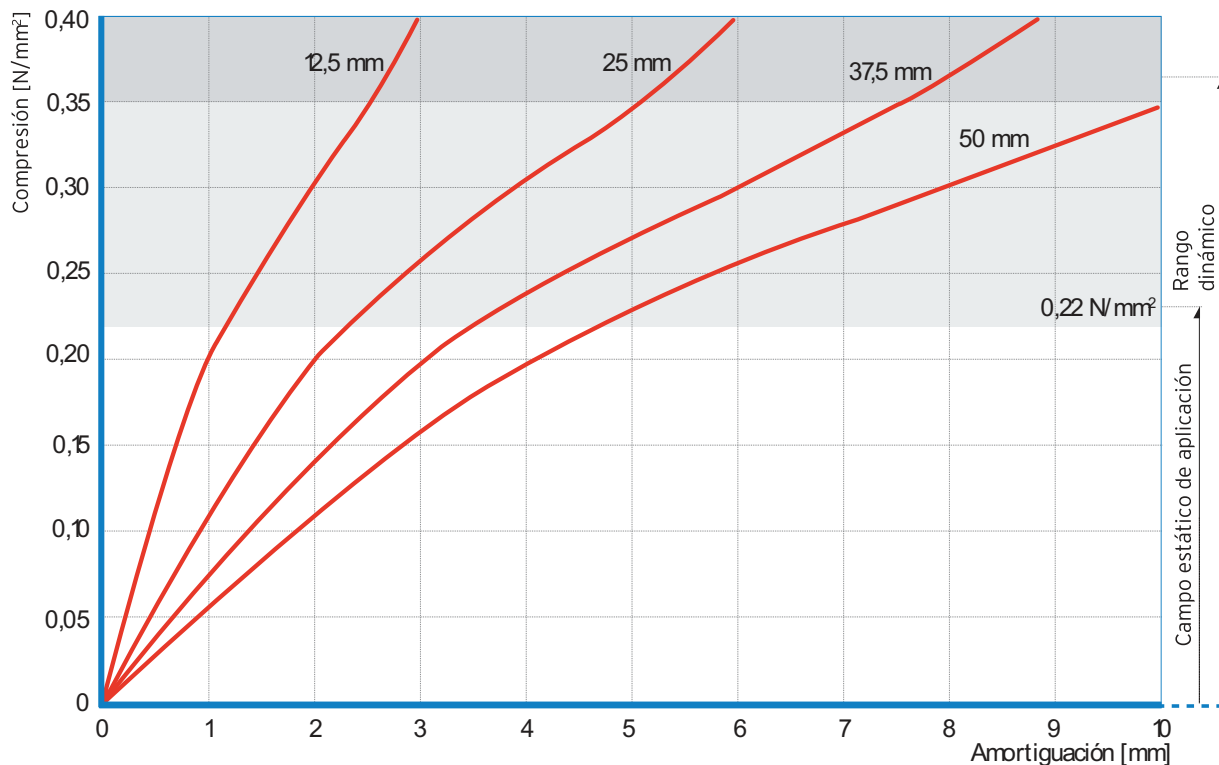

**NATURAL FREQUENCY**

