

1 AMC DB




Spring mount is necessary in all machinery, which, by virtue of its design, has reciprocating or rotating parts, creates vibration to some degree through the imbalance of the moving parts.

This vibration produced by a machine leads to different problems, such as a reduction in the machine's useful life through part wear, plus the transmission of this vibration to other non-insulated adjacent structures, giving rise to problems of noise and vibration transmission. It is therefore important to install a spring mount to machinery.



DRAWINGS

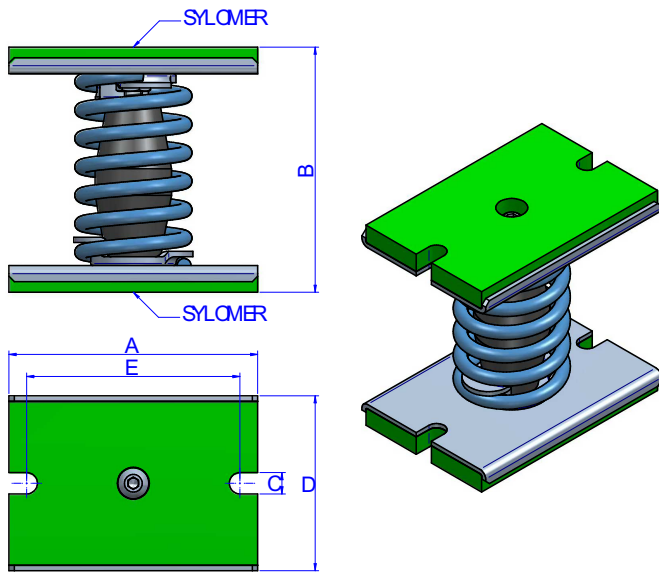

DIMENSIONS

Type	Spring color	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Max. Load (kg)	Weight (kg)	Code
1 AMC 150 + DB Sylomer®	BLUE	140	138	12	98,5	120	150	1,632	20459
1 AMC 200 + DB Sylomer®	WHITE	140	138	12	98,5	120	200	1,632	20520
1 AMC 250 + DB Sylomer®	BLACK	140	138	12	98,5	120	250	1,632	20460
1 AMC 350 + DB Sylomer®	CREAM	140	138	12	98,5	120	350	1,632	20538
1 AMC 500 + DB Sylomer®	LIGHT GREY	140	138	12	98,5	120	500	2,146	20433
1 AMC 750 + DB Sylomer®	GREEN	140	138	12	98,5	120	750	2,146	20429

Elastical properties

LOAD DEFLECTION GRAPH
AMC MECANOCAUCHO® 1 AMC

