

## 2 AMC






Spring mount is necessary in all machinery, which, by virtue of its design, has reciprocating or rotating parts, creates vibration to some degree through the imbalance of the moving parts.

This vibration produced by a machine leads to different problems, such as a reduction in the machine's useful life through part wear, plus the transmission of this vibration to other non-insulated adjacent structures, giving rise to problems of noise and vibration transmission. It is therefore important to install a spring mount to machinery.




DRAWINGS

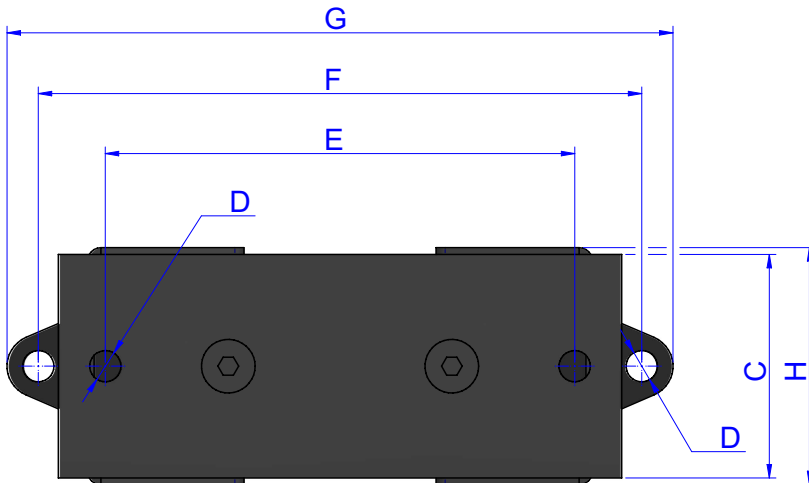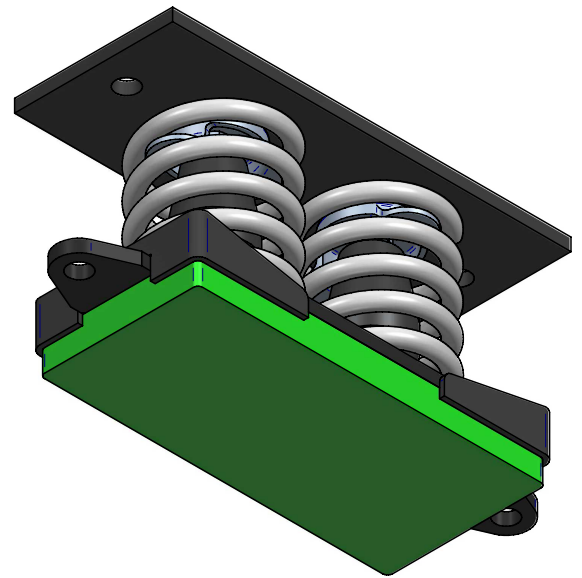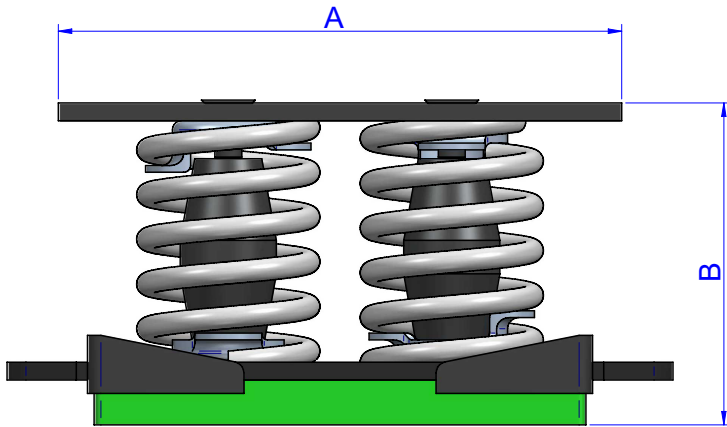

DIMENSIONS

Type	Spring color	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Max. Load (kg)	Weight (kg)	Code
2 AMC 300+Sylomer®	BLUE	200	136	75	12	170	220	244	81	300	3,1	20471
2 AMC 400+Sylomer®	WHITE	200	136	75	12	170	220	244	81	400	3,172	20472
2 AMC 500+Sylomer®	BLACK	200	136	75	12	170	220	244	81	500	3,348	20473
2 AMC 700+Sylomer®	CREAM	200	136	75	12	170	220	244	81	700	3,7	20474
2 AMC 1000+Sylomer®	LIGHT GREY	250	136	100	14	210	270	298	106	1000	5,9	20475
2 AMC 1500+Sylomer®	GREEN	250	136	100	14	210	270	298	106	1500	6,844	20476

DRAWINGS

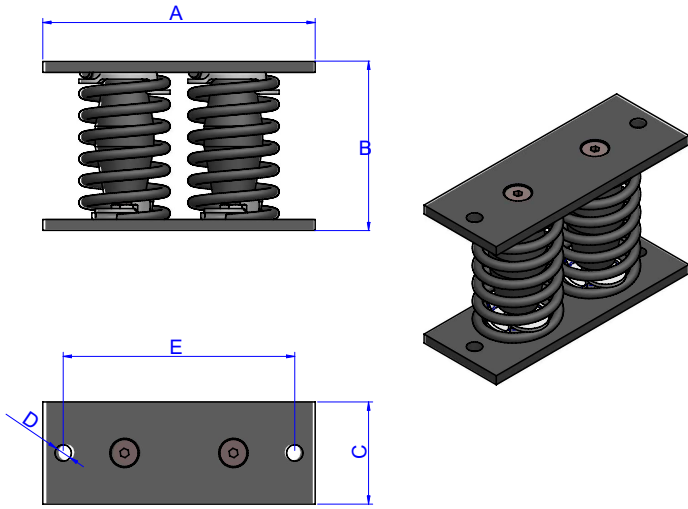


DIMENSIONS

Type	Spring color	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Max. Load (kg)	Weight (kg)	Code
2 AMC 300	BLUE	200	124	75	12	170	-	-	-	300	3,1	20401
2 AMC 400	WHITE	200	124	75	12	170	-	-	-	400	3,172	20411
2 AMC 500	BLACK	200	124	75	12	170	-	-	-	500	3,348	20421
2 AMC 700	CREAM	200	124	75	12	170	-	-	-	700	3,7	20431
2 AMC 1.000	LIGHT GREY	250	124	100	14	210	-	-	-	1000	5,9	20441
2 AMC 1.500	GREEN	250	124	100	14	210	-	-	-	1500	6,844	20451

Elastical properties

**LOAD DEFLECTION GRAPH**  
**AMC MECANOCAUCHO® 2 AMC**

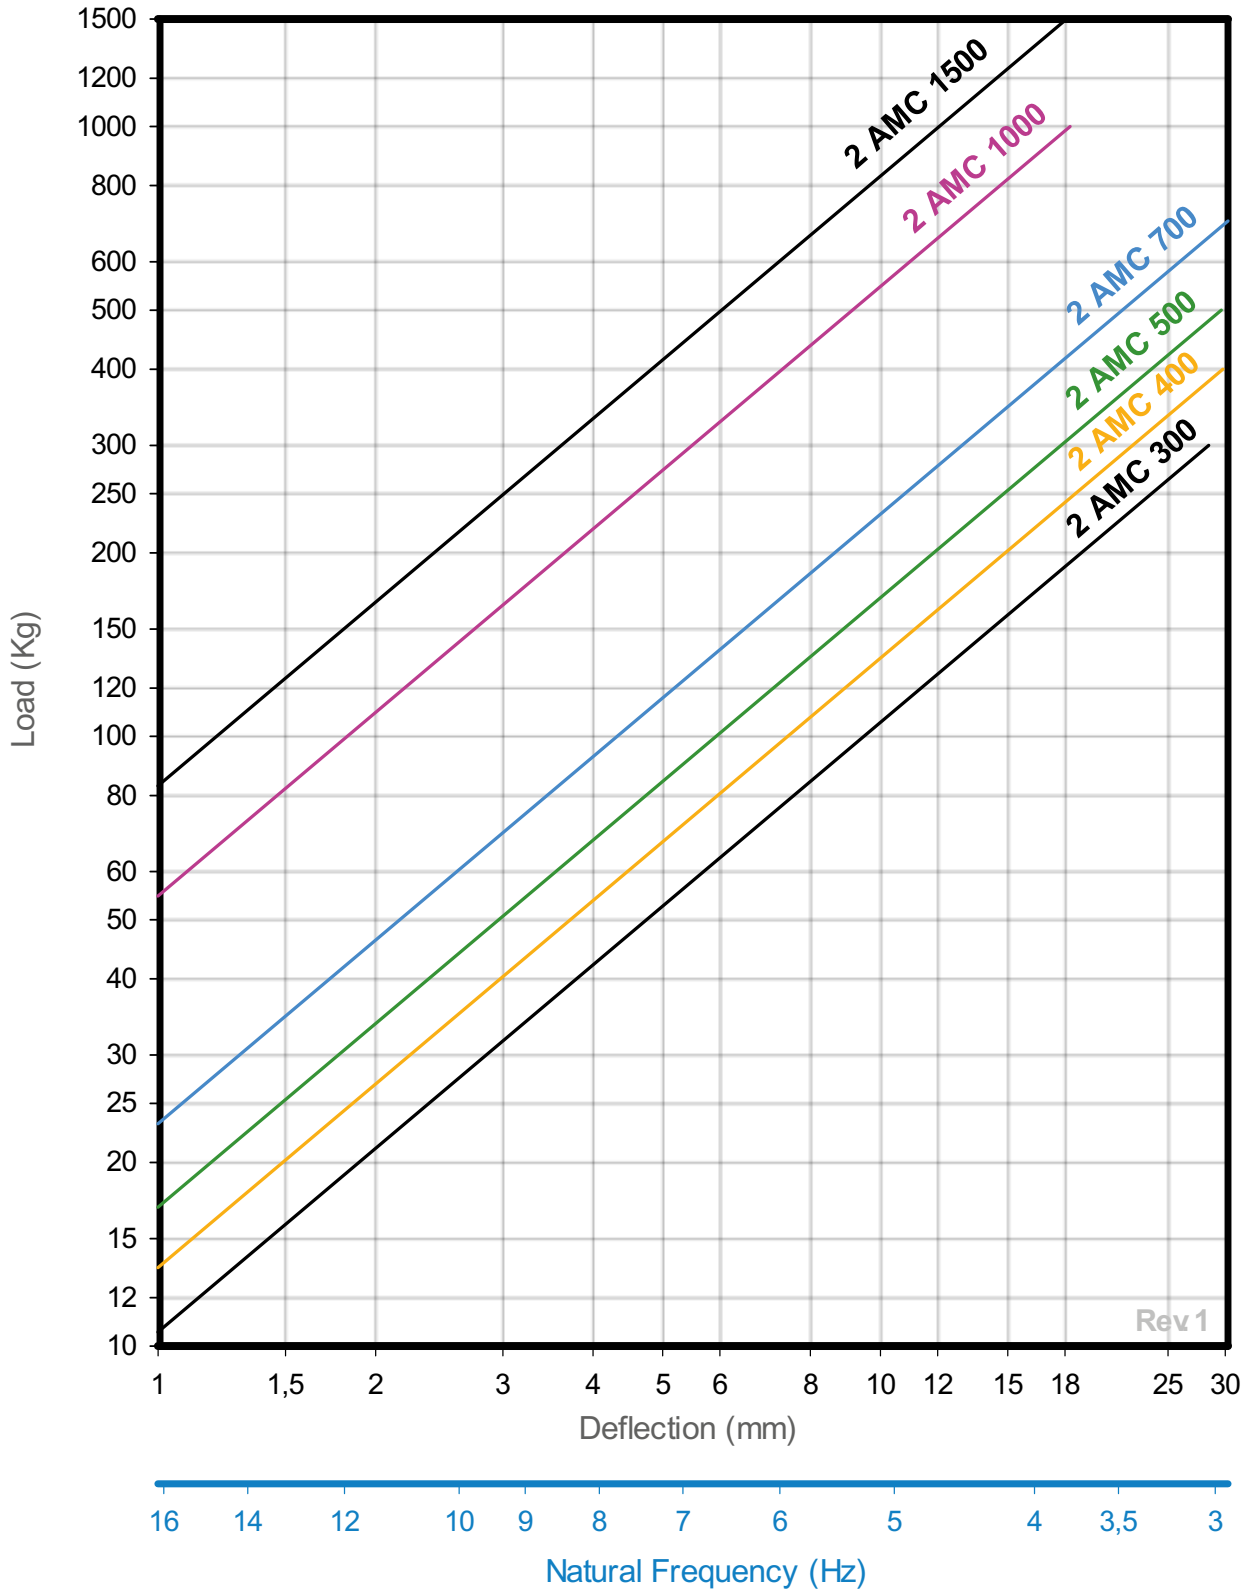

Rev 1