

3 AMC




Spring mount is necessary in all machinery, which, by virtue of its design, has reciprocating or rotating parts, creates vibration to some degree through the imbalance of the moving parts.

This vibration produced by a machine leads to different problems, such as a reduction in the machine's useful life through part wear, plus the transmission of this vibration to other non-insulated adjacent structures, giving rise to problems of noise and vibration transmission. It is therefore important to install a spring mount to machinery.





DRAWINGS

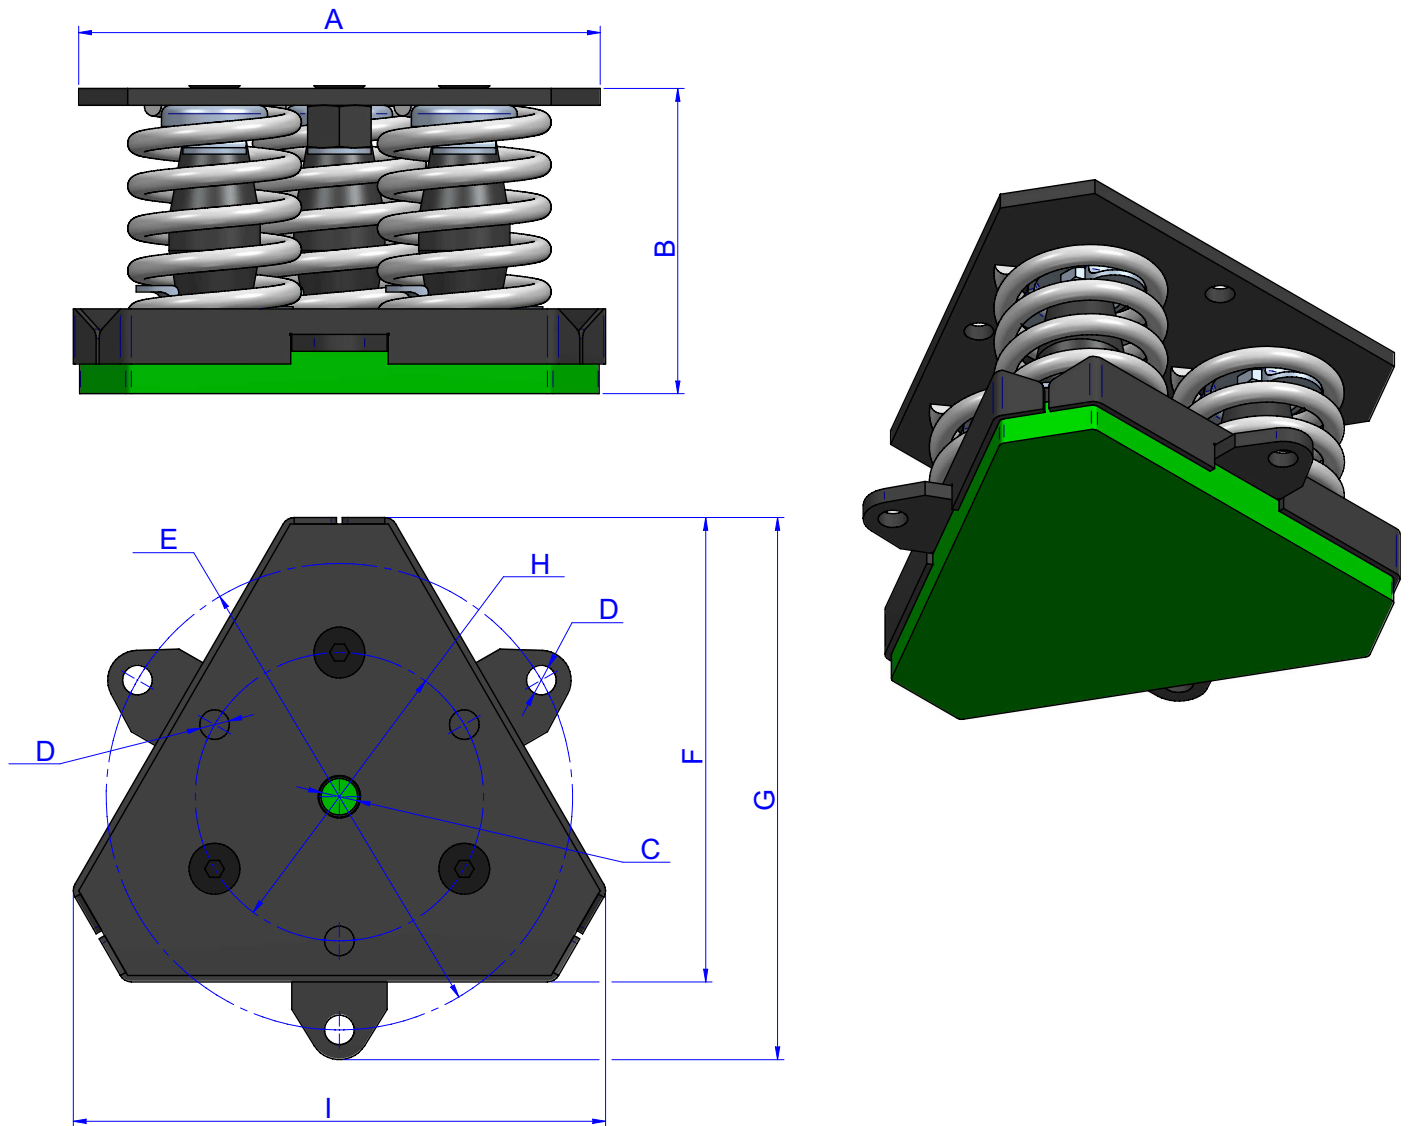

DIMENSIONS

Type	Spring color	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Max. Load (kg)	Weight (kg)	Code
3 AMC 450+Sylomer®	BLUE	196,3	136	M-16	12	180	176	207,7	110	201,4	450	4,6	20571
3 AMC 600+Sylomer®	WHITE	196,3	136	M-16	12	180	176	207,7	110	201,4	600	4,714	20572
3 AMC 750+Sylomer®	BLACK	196,3	136	M-16	12	180	176	207,7	110	201,4	750	4,978	20573
3 AMC 1050+Sylomer®	CREAM	196,3	136	M-16	12	180	176	207,7	110	201,4	1050	5,524	20574
3 AMC 1500+Sylomer®	LIGHT GREY	246	136	M-20	14	220	219	255,7	136	251	1500	8,564	20575
3 AMC 2250+Sylomer®	GREEN	246	136	M-20	14	220	219	255,7	136	251	2250	9,964	20576

DRAWINGS

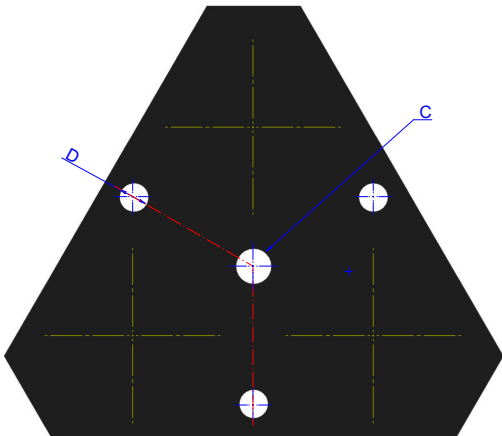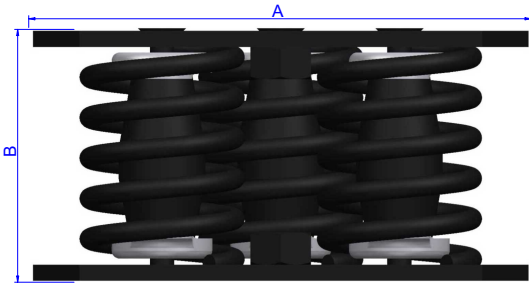

DIMENSIONS

Type	Spring color	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Max. Load (kg)	Weight (kg)	Code
3 AMC 450	BLUE	196,3	124	M-16	12	-	-	-	-	-	450	4,6	20501
3 AMC 600	WHITE	196,3	124	M-16	12	-	-	-	-	-	600	4,714	20511
3 AMC 750	BLACK	196,3	124	M-16	12	-	-	-	-	-	750	4,978	20521
3 AMC 1050	CREAM	196,3	124	M-16	12	-	-	-	-	-	1050	5,524	20531
3 AMC 1500	LIGHT GREY	242	124	M-20	14	-	-	-	-	-	1500	8,564	20541
3 AMC 2250	GREEN	242	124	M-20	14	-	-	-	-	-	2250	9,964	20551

Elastical properties

