

4 AMC





Spring mount is necessary in all machinery, which, by virtue of its design, has reciprocating or rotating parts, creates vibration to some degree through the imbalance of the moving parts.

This vibration produced by a machine leads to different problems, such as a reduction in the machine's useful life through part wear, plus the transmission of this vibration to other non-insulated adjacent structures, giving rise to problems of noise and vibration transmission. It is therefore important to install a spring mount to machinery.




DRAWINGS

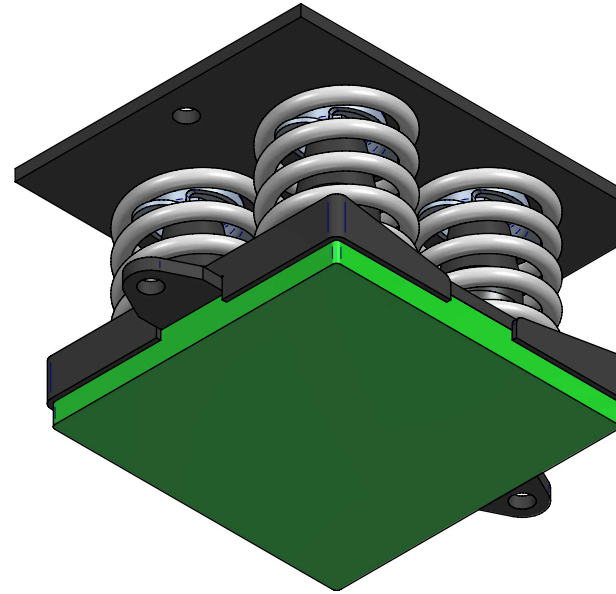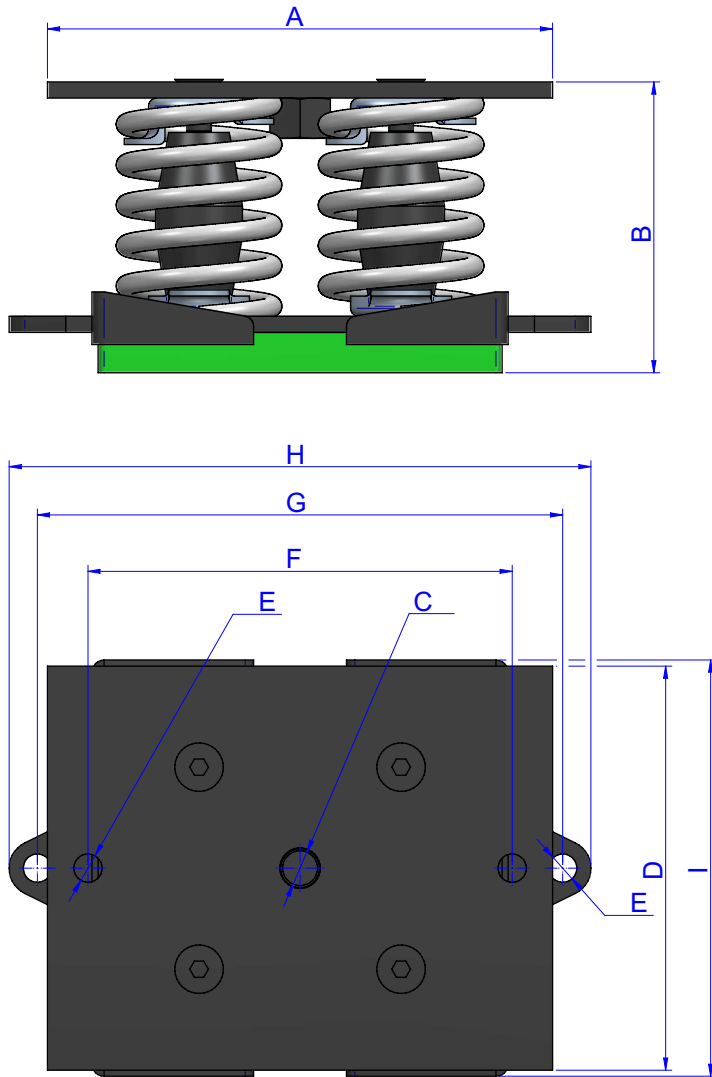

DIMENSIONS

Type	Spring color	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Max. Load (kg)	Weight (kg)	Code
4 AMC 600+Sylomer®	BLUE	200	136	M-16	150	12	170	190	214	156	600	6,412	20671
4 AMC 800+Sylomer®	WHITE	200	136	M-16	150	12	170	190	214	156	800	6,572	20672
4 AMC 1000+Sylomer®	BLACK	200	136	M-16	150	12	170	190	214	156	1000	6,7	20673
4 AMC 1400+Sylomer®	CREAM	200	136	M-16	150	12	170	190	214	156	1400	7,636	20674
4 AMC 2000+Sylomer®	LIGHT GREY	250	136	M-20	200	14	210	260	288	206	2000	12,1	20675
4 AMC 3000+Sylomer®	GREEN	250	136	M-20	200	14	210	260	288	206	3000	13,962	20676

DRAWINGS

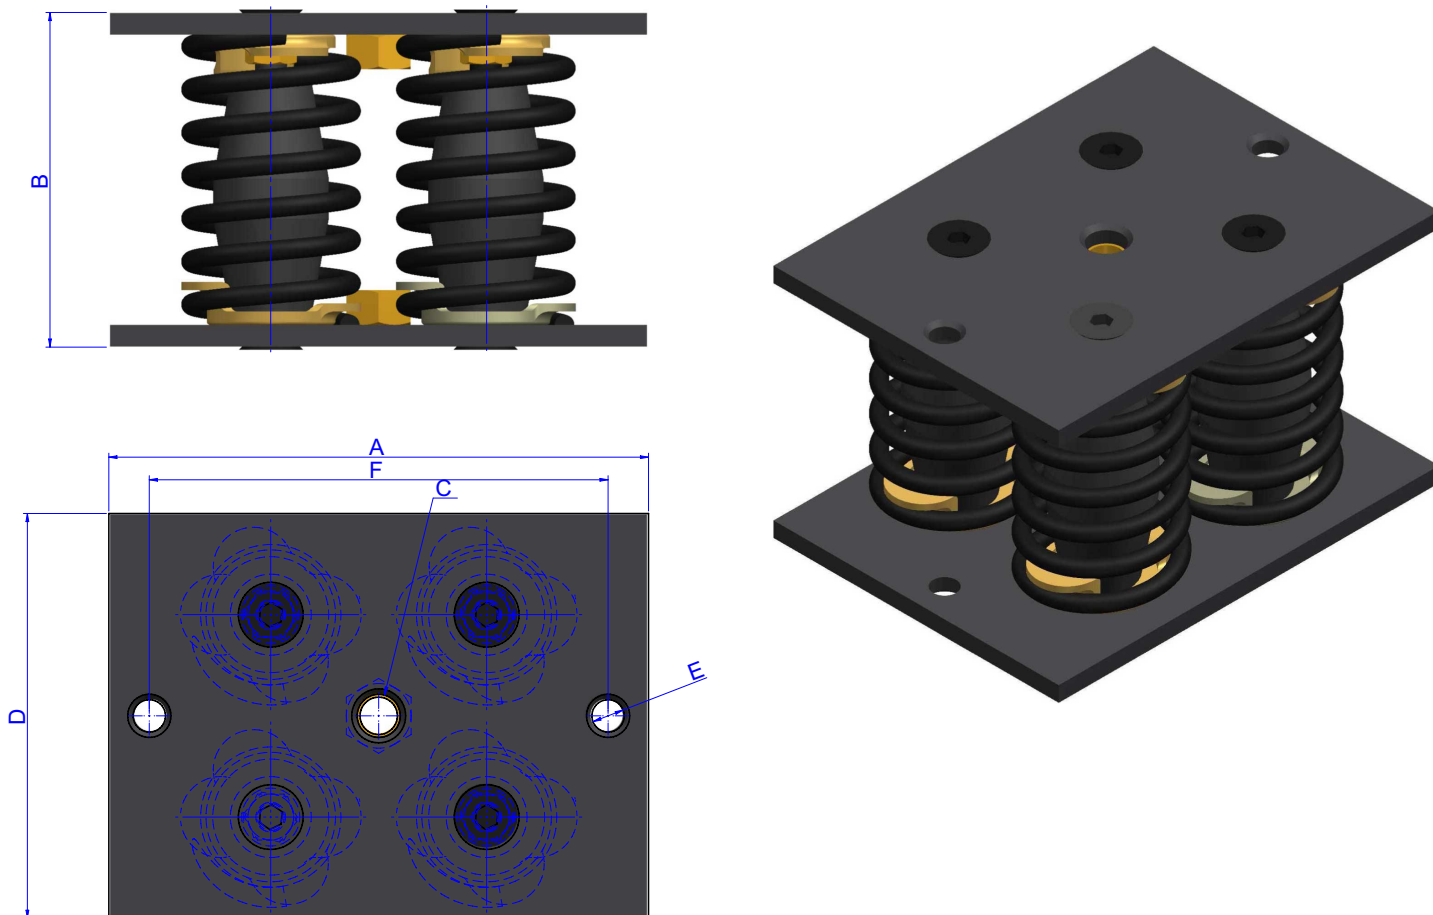

DIMENSIONS

Type	Spring color	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Max. Load (kg)	Weight (kg)	Code
4 AMC 600	BLUE	200	124	M-16	150	12	170	-	-	-	600	6,412	20601
4 AMC 800	WHITE	200	124	M-16	150	12	170	-	-	-	800	6,572	20611
4 AMC 1000	BLACK	200	124	M-16	150	12	170	-	-	-	1000	6,7	20621
4 AMC 1400	CREAM	200	124	M-16	150	12	170	-	-	-	1400	7,636	20631
4 AMC 2000	LIGHT GREY	250	124	M-20	200	14	210	-	-	-	2000	12,1	20641
4 AMC 3000	GREEN	250	124	M-20	200	14	210	-	-	-	3000	13,962	20651

Elastical properties

