

Akustikabsorber

FARM



Black unwoven film, M-1 class fireresistant absorbing polyurethane foam and 5 Kg/m2 heavy viscoelastic mass.

Measurements according to UNE-EN ISO 140-3 standard (December 1995) Acoustic Isolation of Construction Materials in Laboratory Measurements. Corresponds completely with ISO 140-3(1995) standard. Cancels and substitutes UNE 74-040/3 (1984) standard. Calculations according to NBECA88.

Type	Code	SELF-ADHESIVE	Rw (dB)	Weight (kg)
FARM-15 sheet	26261	-	12	7,335
FARM-15 A sheet	26263	x	12	7,335
FARM-25 sheet	26262	-	13	8,085
FARM-25 A sheet	26264	x	13	8,085

TECHNICAL CHARACTERISTICS

— Composition

Black unwoven film, M-1 class fireresistant absorbing polyurethane foam and 5 Kg/m2 heavy viscoelastic mass.

— Thicknesses

15mm 25mm

FORMATS

— Sheets

1200x1000 mm
15mm thick, 8 Sheets per box.
25mm thick, 5 Sheets per box.

APPLICATIONS

Lining interior of soundproof cabins and vehicles, good absorption, absorbent with M-1 class fireresistant behaviour and damping sheet that increases the mass and dampens vibrations.


Akustikabsorber

FARM

ACOUSTIC PROPERTIES

Transmission Loss (dB)

FARM

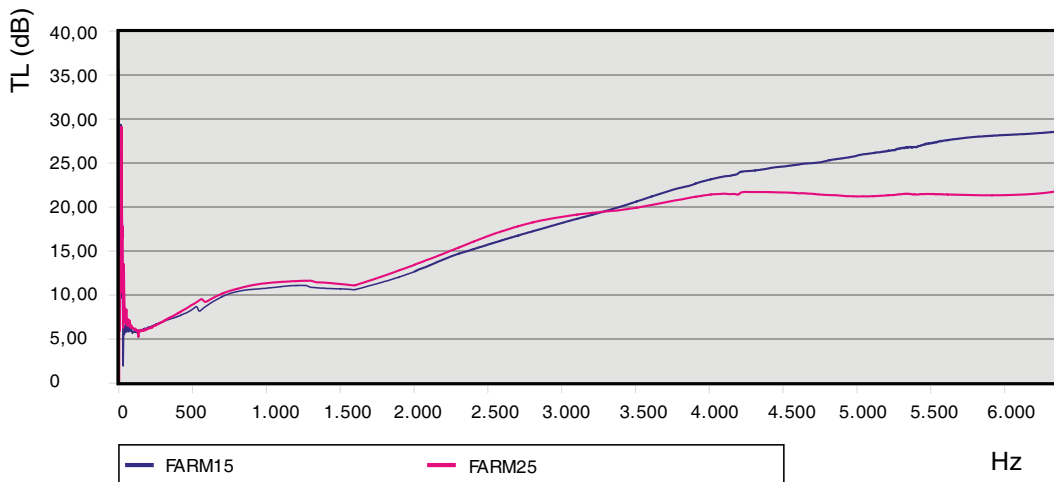

Absorption coefficient

FARM

