


Akustikabsorber

PDM

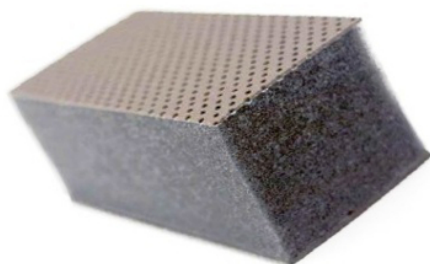

Beige colour perforated PVC facing, absorbing polyurethane foam and 5 Kg/m² heavy viscoelastic mass.

Measurements according to UNE-EN ISO 140-3 standard (December 1995) Acoustic Isolation of Construction Materials in Laboratory Measurements. Corresponds completely with ISO 140-3(1995) standard. Cancels and substitutes UNE 74-040/3 (1984) standard. Calculations according to NBCEA88.

Tipo	Codice	autoadesive	Rw (dB)	Peso (kg)
PDM-15 plancha	26108	-	12	7,113
PDM-15 A plancha	26102	☐	12	7,113
PDM-25 plancha	26110	-	12	7,415
PDM-25 A plancha	26104	☐	12	7,415
PDM-40 plancha	26112	-	20	7,868
PDM-40 A plancha	26106	☐	20	7,868

CARATTERISTICHE TECNICHE

— Composition

Beige colour perforated PVC facing, absorbing polyurethane foam and 5 Kg/m² heavy viscoelastic mass.

— Thicknesses

15mm 25mm 40mm

FORMATS

— Sheets

1200x1000 mm
15mm thick, 8 Sheets per box.
25mm thick, 5 Sheets per box.
40mm thick, 3 Sheets per box.

APPLICAZIONI

Revestimiento interior de cabinas insonorizadas o de vehículos, buena absorción y lámina amortizante que aumenta la masa y amortigua las vibraciones.


Akustikabsorber

PDM

PROPRIETÀ ACUSTICHE

Transmission Loss (dB)

PDM

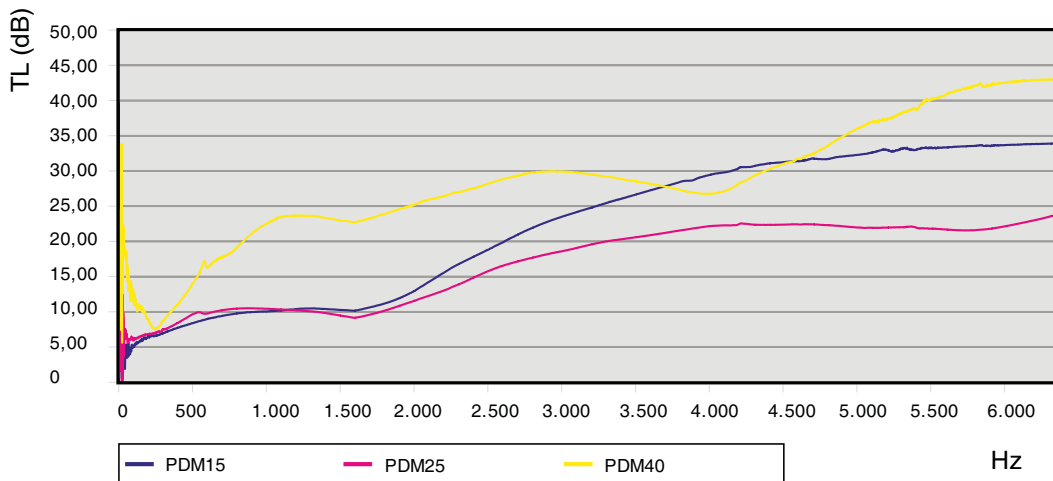

Absorption coefficient

PDM

